China · Kang Wei electronics co., LTD

Product Specification

65R-B

Approval	UL	IEC
Electrical		
Standard	**UL**	**IEC**
Rated voltage	300V	450V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm²
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ/DC500V	
Mechanical		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40℃~+105℃	
Dimensions		
Pitch	11.0mm(.433″)	
Poles	2P-22P	
Material		
Housing	PA66,UL94V-0	
Terminal	Brass,1.0t,Tin Plated	
Screws	Steel,M4 Ni Plated	

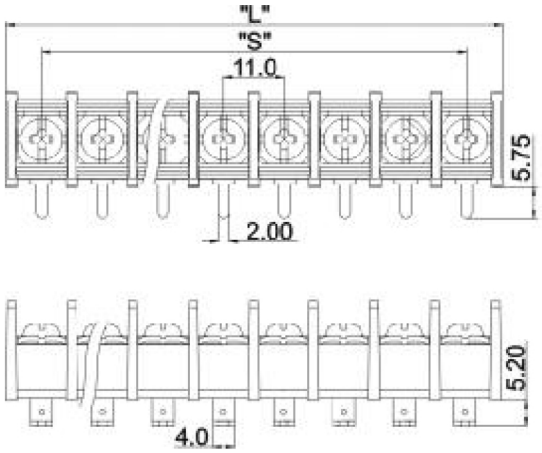

"S"=11.0x(P-1)
"L"=11.0x(P-1)+13.0



HOW TO ORDER :

DG65 ☐ — ☐ — ☐ ☐ P — 1 ☐ — X X X (Customer Request)

- C: ☐ S: ☐ H: ☐ R: ☐
- A Mount Ends
- B Barrier Ends
- NO. of Pole
- Color: 1 Grey, 3 Black, 4 Green

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	24.00	35.00	46.00	57.00	68.00	79.00	90.00	101.00	112.00	123.00	134.00	145.00	156.00	167.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00

Poles	16	17	18	19	20	21	22	23	24	25	26	27	28
L(mm)	178.00	189.00	200.00	211.00	222.00	233.00	244.00	255.00	266.00	277.00	288.00		
S(mm)	165.00	176.00	187.00	198.00	209.00	220.00	231.00	242.00	253.00	264.00	275.00		

mm (INCH)

THIRDANGLE PROJECTION

China · Kang Wei electronics co., LTD

NAME 65R-B