








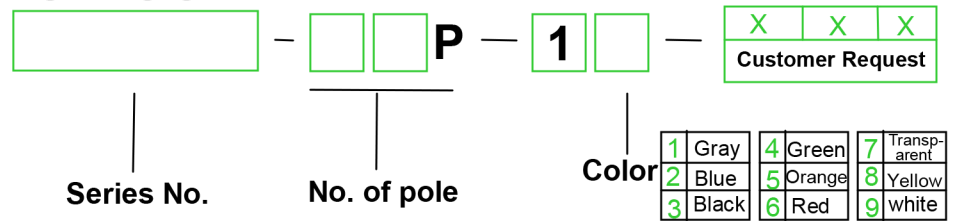




| Approval | | | |
|--|---|------------|------------------------|
| Electrical Standard | | UL | IEC |
| Voltage | | - | - |
| Current | | 6.3A | 6.3A |
| Wire size | | 22-12AWG | 0.5-4.0mm ² |
| T/W/End plate | | | 8/58/1.5mm |
| Height(NS35:7.5/NS35:15/NS32) | | | 44/51.5/45.5mm |
| Rated surge voltage/Contamination class | | | 6KV/3 |
| Stripping length | | | 8mm |
| Screw thread/Tightening torque | | | M3.5/0.8N.m/7.0Lb-in |
| Insulating material/Inflammability class | | | PA/V-0 |
| Specification | | Model | Pieces |
| (1)Terminal block | | MKK 1/LD | 100 |
| (2)Cover |  | D-MKK 1/LD | 100 |
| (3)Partition plate |  | | |
| (4)Separating plate |  | | |
| (5)Cross connection links |  | | |
| (6)Protective covers |  | | |
| (7)Test plug |  | | |
| (8)Lockout device |  | | |
| (9)Test plug |  | TH | 100 |
| (8)Zack strip |  | DEK 6 | |

HOW TO ORDER :



| | |
|---|---|
|  |  China · Kang Wei electronics co., LTD |
|  | NAME 2.5RD/ASK1 |