




Approval		
Electrical	UL	IEC
Standard	300V	450V
Rated voltage	30A	41A
Rated current	22-10AWG	4.0mm ²
Wire range	AC2000V/1Min	
With standing voltage	500MΩ /DC500V	
Insulation Resistance	Mechanical	
	Max. Torque Value 1.2N.m 10.6Lb.in	
	Ambient temperature -40℃~+105℃	
	Dimensions	
	Pitch 11.11mm(.437")	
	Poles 2P-12P	
	Material	
	Housing PA66,UL94V-0	
	Terminal Brass,0.8t Tin plated	
	Screws Steel,M4 Ni plated	

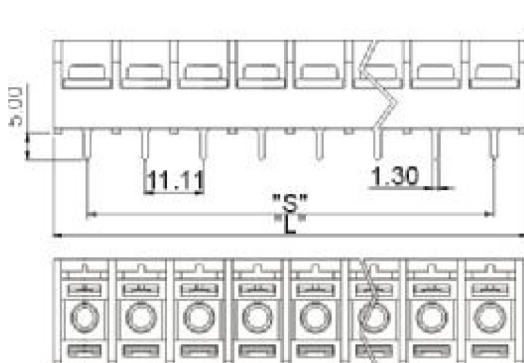

"S"=11.11x(P-1)
 "L"=11.11x(P-1)+12.4

HOW TO ORDER :

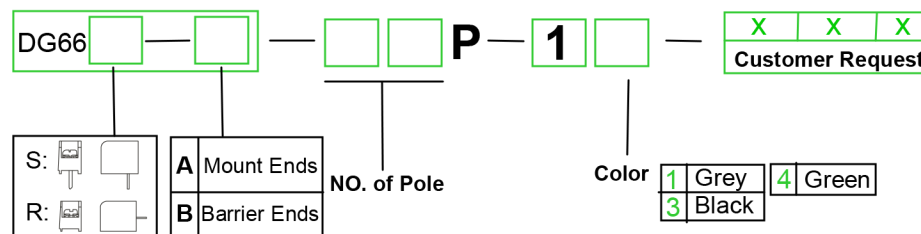

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.51	34.62	45.73	56.84	67.95	79.06	90.17	101.28	112.39	123.50	134.61	145.72	156.83	167.94
S(mm)	11.11	22.22	33.33	44.44	55.55	66.66	77.77	88.88	99.99	111.10	122.21	133.32	144.43	155.54
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	179.05	190.16	201.27	212.38	223.49	234.60	245.71	256.82	267.93	279.04	290.15			
S(mm)	166.65	177.76	188.87	199.98	211.09	222.20	233.31	244.42	255.53	266.64	277.75			

	China · Kang Wei electronics co., LTD
	NAME <u> KV66S-B </u>