




CE

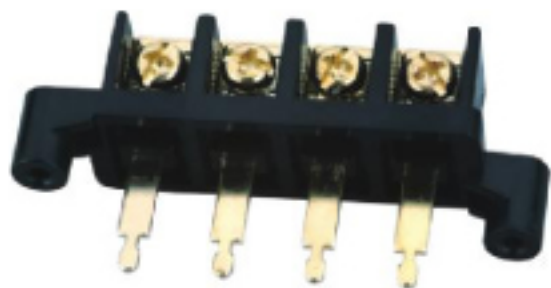

KV12-A

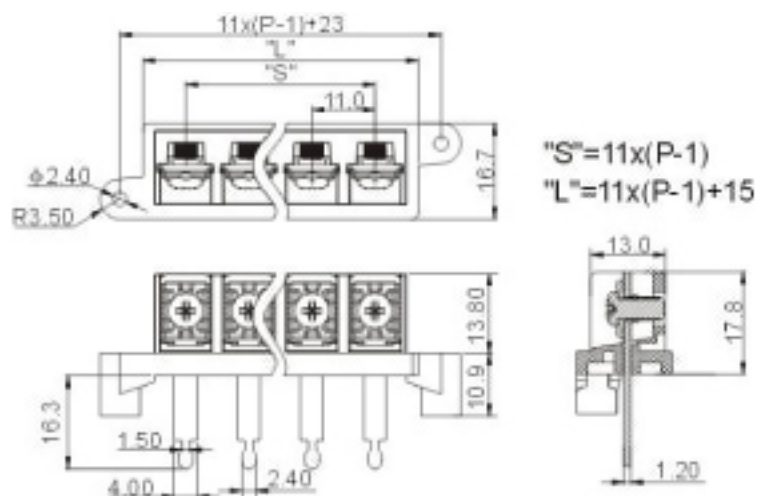

APPROVAL	 Certification Link	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	30A	41A
Wire range	18-10AWG	6.0mm ²
Withstand Voltage	AC2000V/Min	
Insulation Resistance	1000MΩ/DC500V	
Mechanical		
Max.Torque Value	1.2N.m 10.6lb.in	
Ambient temperature	-40°C ~ +80°C	
Dimensions		
Pitch	PC UL 94V-2	
Poles	2P-11P	
Material		
Housing	PC UL 94V-2	
Terminal	Brass, 1.2t, Gold plated	
Screws	Steel, M4 Gold plated	

HOW TO ORDER :

- P - 1 -

X	X	X
Customer Request		

Series number


No. of pole

Color

1 Grey	4 Green	7 Tan/Pink
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	26.00	37.00	48.00	59.00	70.00	81.00	92.00	103.00	114.00	125.00	135.00	147.00	158.00	169.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	80.00	91.00	102.00	113.00	124.00	135.00	146.00	157.00	168.00	179.00	190.00			
S(mm)	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00	21.00			

mm
(INCH)



China · Kang Wei electronics co., LTD

NAME

KV12-A