





Approval	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	25A	32A
Wire range	22-12AWG	4.0mm ²
With standing voltage	AC3000V/1Min	
Insulation Resistance	1000MΩ /DC500V	
Mechanical		
Max. Torque Value	0.8N.m 7.0Lb.in	
Ambient temperature	-40℃~+80℃	
Dimensions		
Pitch	11.0mm(.433")	
Poles	2P-18P	
Material		
Housing	PC,UL94V-2	
Terminal	Brass,0.8t Tin plated	
Screws	Steel,M3.5 Ni plated	



HOW TO ORDER :

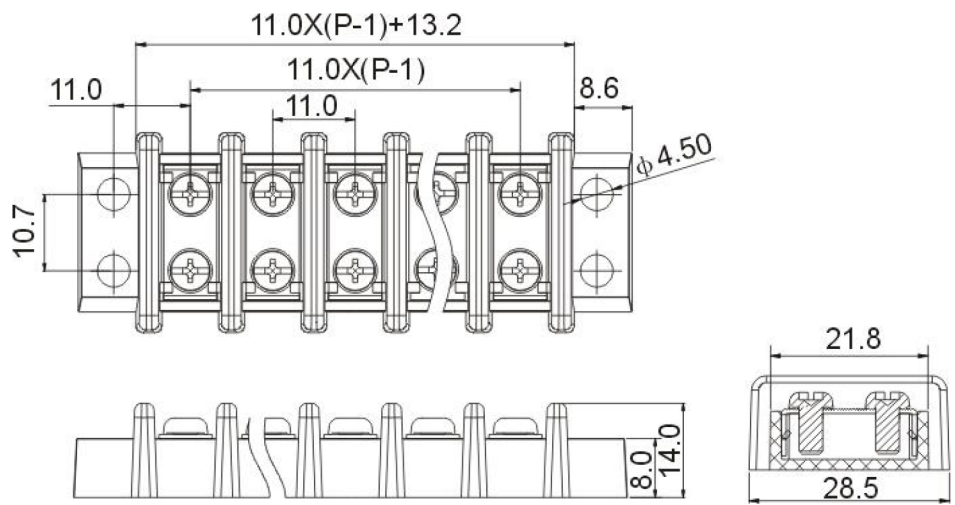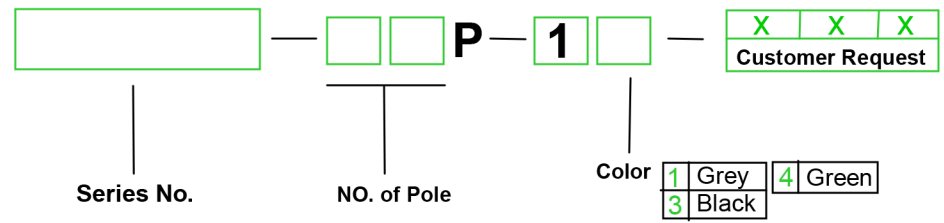

	 China · Kang Wei electronics co., LTD
	NAME KV69-A