



# 康伟栅栏式PCB接线端子


产品规格书

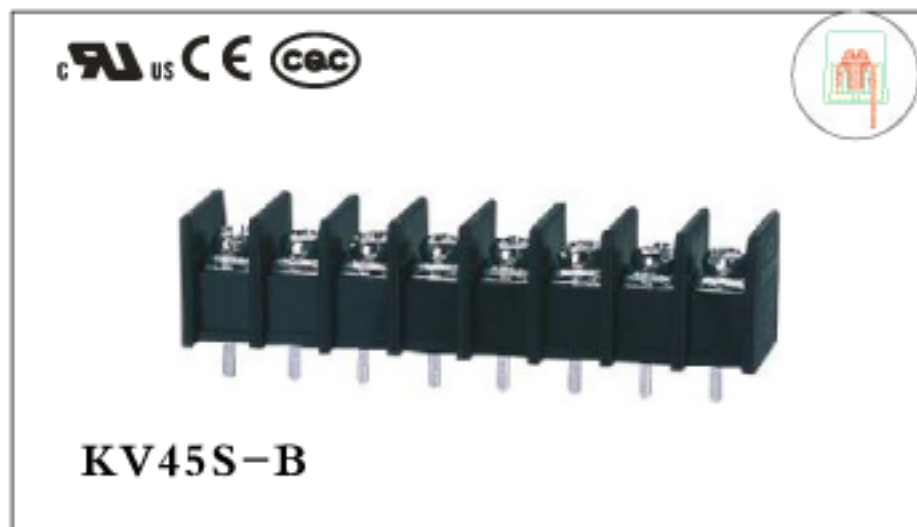

认证	UL	CE
电气性能	UL	IEC
参考标准	300V	750V
额定电压	25A	32A
额定电流	22-12AWG	4.0mm <sup>2</sup>
导线线径	AC2000V/1Min	
耐电压	500MΩ/DC500V	
绝缘阻抗	1.2Nm/10.6Lb.in	
机械性能	-40℃~+105℃	
最大锁紧扭力	9.5mm(.375")	
环境温度	2P-22P	
尺寸		
间距		
极数		
材质及电镀		
塑件	PA66, UL94V-0	
端子	黄铜, 0.8厚 镀锡	
螺丝	钢, M4标准	

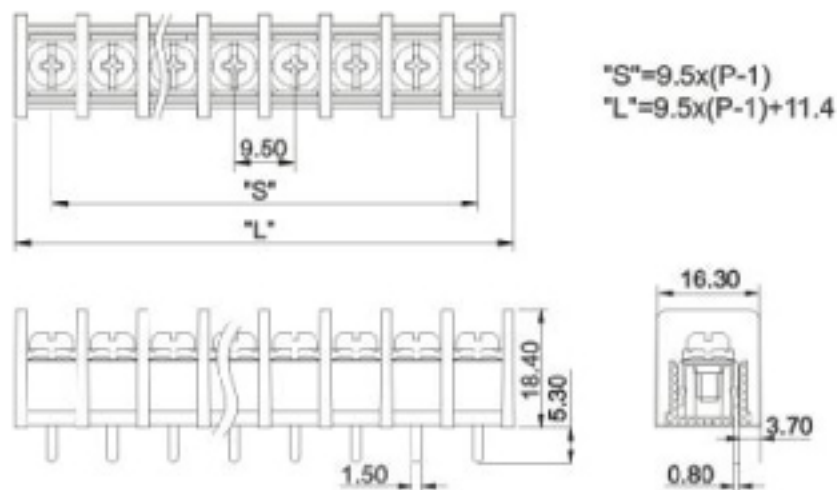

订购方式:

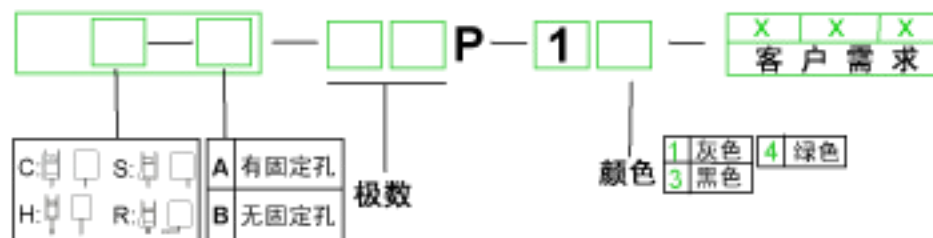

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90	106.40	115.90	125.40	134.90	144.40
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.90	163.40	172.90	182.40	191.90	201.40	210.90	220.40	229.90	239.40	248.90			
S(mm)	127.40	136.90	146.40	155.90	165.40	174.90	184.40	193.90	203.40	212.90	222.40	231.90	241.40	

	中国·康伟电子有限公司
	NAME <b>KV45S-B</b>