


康伟栅栏式PCB接线端子


产品规格书



KV65C-A

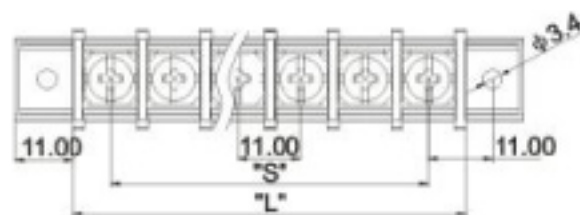


$S^* = 11.0 \times (P - 1)$
 $L^* = 11.0 \times (P - 1) + 13.0$

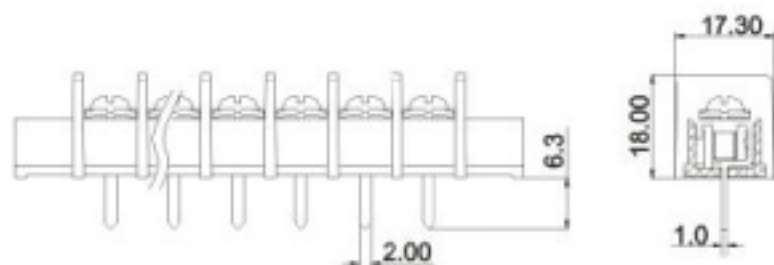

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	24.00	35.00	46.00	57.00	68.00	79.00	90.00	101.00	112.00	123.00	134.00	145.00	156.00	167.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	78.00	89.00	100.00	111.00	122.00	133.00	144.00	155.00	166.00	177.00	188.00			
S(mm)	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00	165.00	176.00			

认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	750V
额定电流	20A	32A
导线线径	22-12AWG	4.0mm ²
耐电压		AC2000V/1Min
绝缘阻抗		500MΩ/DC500V
机械性能		
最大锁紧扭力		1.2Nm/10.6Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		11.0mm(.433")
极数		2P-20P
材质及电镀		
塑件		PA66, UL94V-0
端子		黄铜, 1.0厚 镀锡
螺丝		钢, M4镀锌

订购方式:

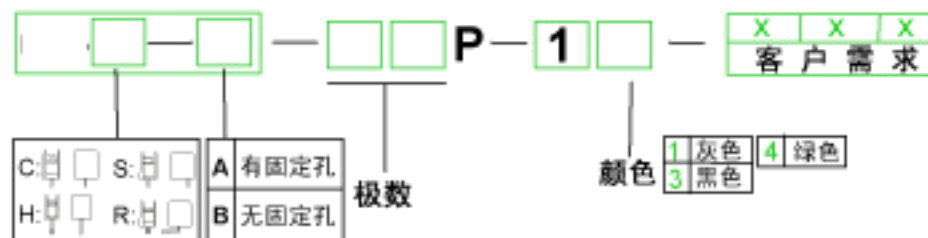

		中国·康伟电子有限公司
	NAME	KV65C-A