



康伟栅栏式PCB接线端子

产品规格书

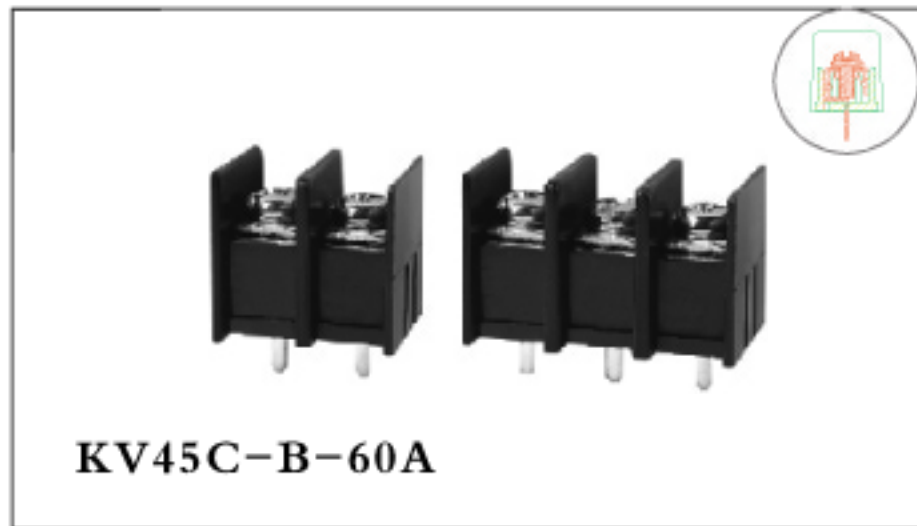

KV45C-B-60A

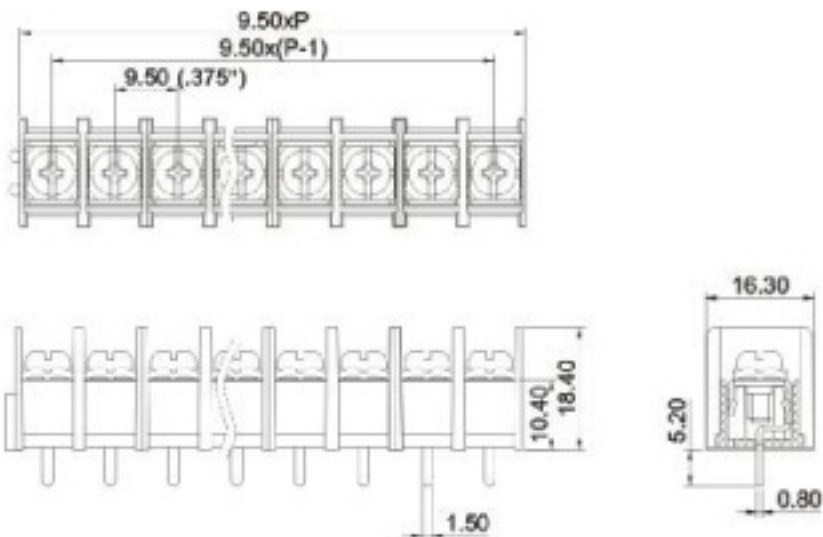

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.90	30.40	39.90	49.40	58.90	68.40	77.90	87.40	96.90	106.40	115.90	125.40	134.90	144.40
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.90	163.40	172.90	182.40	191.90	201.40	210.90	220.40	229.90	239.40	248.90			
S(mm)	127.00	136.50	146.00	155.50	165.00	174.50	184.00	193.50	203.00	212.50	222.00	231.50	241.00	

认证

电气性能

参考标准

额定电压

额定电流

导线线径

耐电压

绝缘阻抗

机械性能

最大锁紧扭力

环境温度

尺寸

间距

极数

材质及电镀

塑件

端子

螺丝

UL

300V

25A

22-12AWG

AC2000V/1Min

500MΩ/DC500V

1.2Nm/10.6Lb.in

-40℃~+105℃

9.5mm(.375")

2P-24P

PA66,UL94V-0

黄铜,0.8厚 镀锡

钢, M4镀锌



IEC

750V

32A

4.0mm²

订购方式:

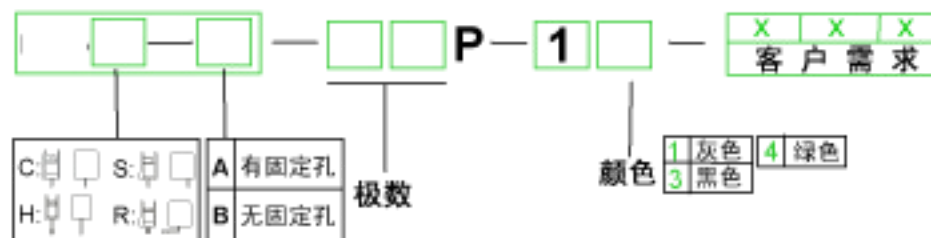

中国·康伟电子有限公司

NAME

KV45C-B-60A