


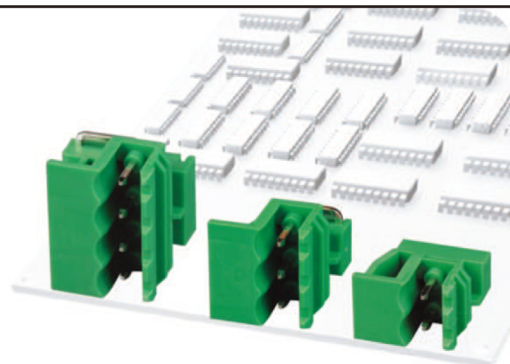


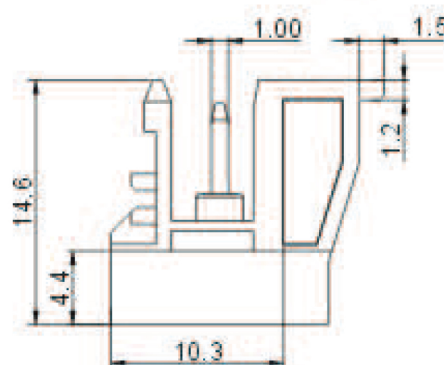

2EDGRF-5.0

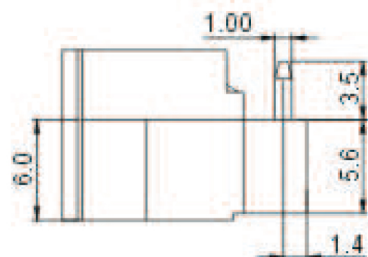

APPROVAL

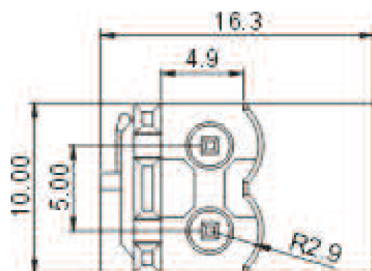

Electrical

Standard

UL

IEC

Rated voltage

300V

320V

Rated current

15A

20A

Withstanding voltage

AC2500V/1Min

Mechanical

Ambient temperature

-40℃~+105℃

Dimensions

Pitch

5.0mm(.197") 5.08mm(.200")

Poles

2P-4P

Material

Housing

PA66,UL94 V-0

Pin header

Copper, Tin plated

HOW TO ORDER :

- P - -

X	X	X
Customer Request		


Series number

No. of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



China · Kang Wei electronics co., LTD

NAME

2EDGRF-5.0