


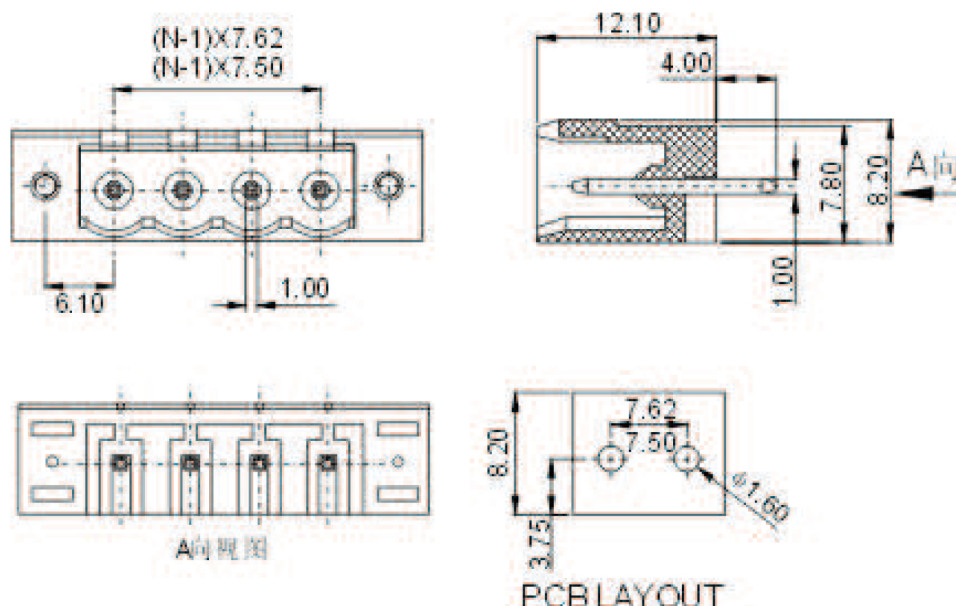

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	20A
Withstanding voltage	AC2500V/1Min	
Mechanical		
Ambient temperature	-40°C~+105 °C	
Dimensions		
Pitch	7.5mm(.295") 7.62mm(.300")	
Poles	2P-12P	
Material		
Housing	PA66,UL94 V-0	
Pin header	Brass,Tin plated	

The diagram illustrates the structure of a 12-digit barcode used for a Customer Request. The barcode is divided into segments as follows:

- Series number:** 4 digits (represented by a box).
- No. of poles:** 2 digits (represented by two boxes).
- Pitch:** 1 digit (represented by a box with the number 1).
- Color:** 5 digits (represented by a box with the number 1, followed by a box with the number 1, and a box with the number 1).

The Color segment is further divided into 3 digits for Color and 2 digits for Trans Parent.

Color	Trans Parent
1 Grey	4 Green
2 Blue	5 Orange
3 Black	6 Red
	7 Trans Parent
	8 Yellow
	9 White

	 China · Kang Wei electronics co., LTD
 THIRD ANGLE PROJECTION	NAME 2EDGVM-7.5 2EDGVM-7.62