





<b>APPROVAL</b>	 	
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	400V
Rated current	15A	20A
Withstanding voltage	AC2500V/1Min	
<b>Mechanical</b>		
Ambient temperature	-40°C~+105 °C	
<b>Dimensions</b>		
Pitch	7.5mm(.295") 7.62mm(.300" )	
Poles	2P-12P	
<b>Material</b>		
Housing	PA66,UL94 V-0	
Pin header	Brass,Tin-plated	



### HOW TO ORDER :

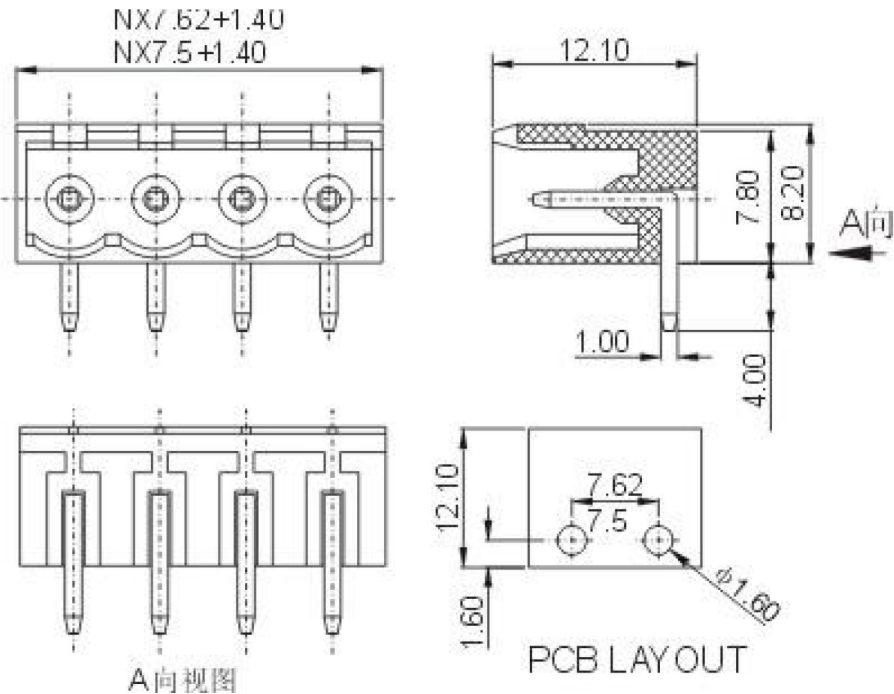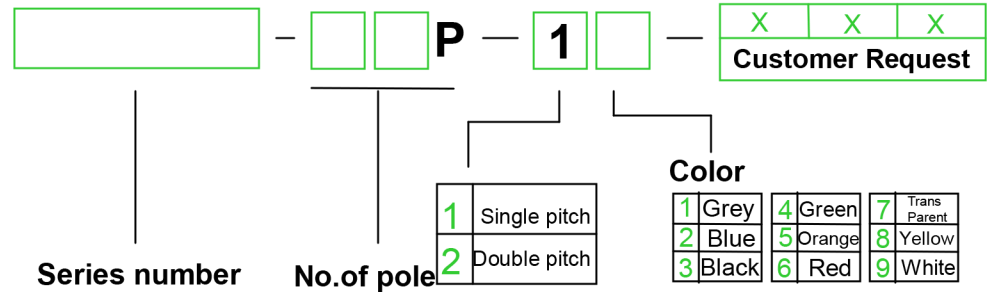

	 <b>China · Kang Wei electronics co., LTD</b>
	<b>NAME</b> <b>2EDGRC-7.5 2EDGRC-7.62</b>