




2EDGKA-5.0
2EDGKA-5.08

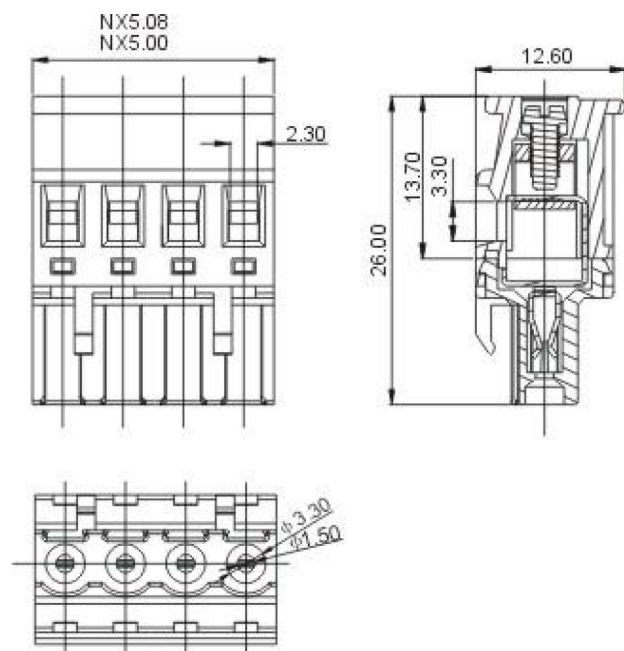

APPROVAL			
Electrical			
Standard	UL	IEC	
Rated voltage	300V	400V	
Rated current	15A	18A	
Wire range	28-12AWG	2.5mm ²	
Withstanding voltage	AC2500V/1Min		
Mechanical			
Torque	0.4Nm(3.5Lb-In)		
Ambient temperature	-40℃~+105℃		
Strip length	7mm		
Dimensions			
Pitch	5.0mm(.197") 5.08mm(.200")		
Poles	2P-24P		
Material			
Housing	PA66,UL94 V-0		
Screws	M2.5,Steel,Cr ³⁺ Zn-plated		
Contact	Phosphor bronze		
Cage	Brass,Ni-plated		

Diagram illustrating the structure of a 4-digit code:

Code structure: [] - [] [] P - [1] [] - [X][X][X]

Legend:

- Series number**: []
- No. of pole**: [] [] P
- Pitch**: [1] []
- Color**: [X][X][X]

Color options table:

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

	 China · Kang Wei electronics co., LTD
THIRD ANGLE PROJECTION	NAME 2EDGKA-5.0 2EDGKA-5.08