




2EDGK-7.5
2EDGK-7.62



APPROVAL

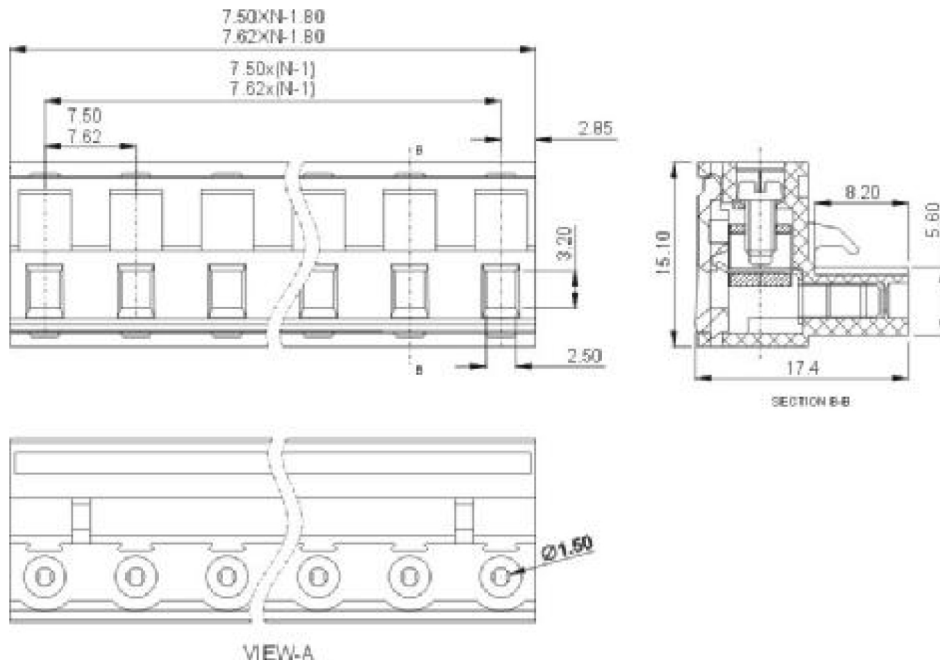

Electrical

Standard

UL

IEC

Rated voltage

300V

400V

Rated current

15A

20A

Wire range

28-12AWG

2.5mm²

Withstanding voltage

AC2500V/1Min

Mechanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-40°C~+105 °C

Strip length

7mm

Dimensions

Pitch

7.5mm(.295") 7.62mm(.300")

Poles

2P-12P

Material

Housing

PA66,UL94 V-0

Screws

M2.5,Steel, Cr³⁺Zn-plated

Contact

Phosphor bronze

Cage

Brass,Ni-plated

HOW TO ORDER :

