
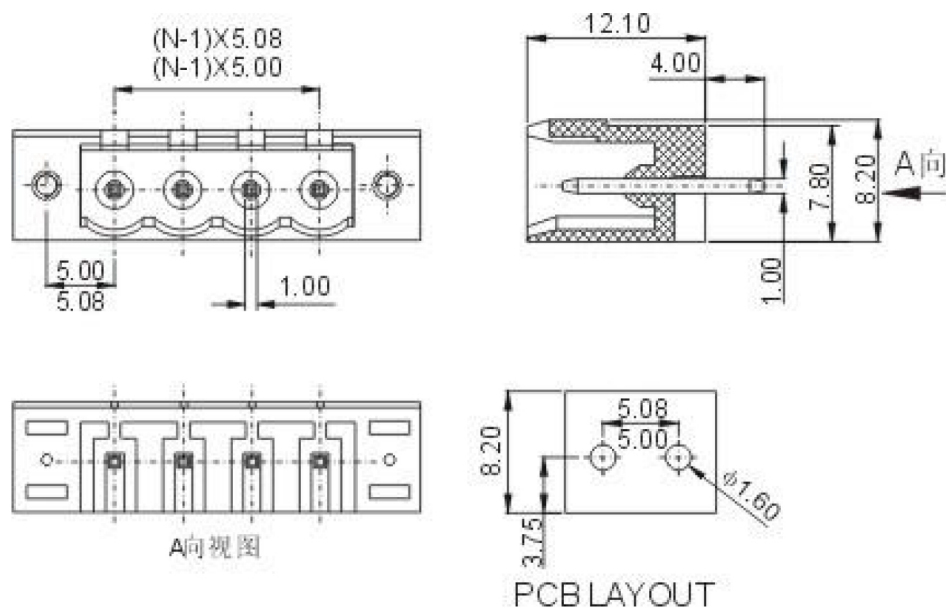


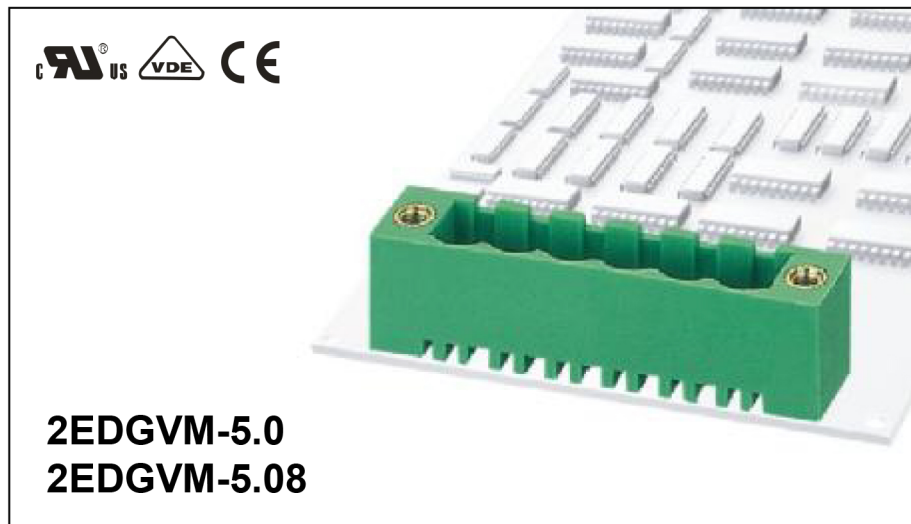

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Withstanding voltage

Mechanical

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Pin header

Nut

UL

VDE

UL

IEC

300V

320V

15A

20A

AC2500V/1Min

-40℃~+105℃

5.0mm(.197") 5.08mm(.200")


2P-22P

PA66,UL94 V-0

Brass,Tin-plated

M2.5, Brass

HOW TO ORDER :

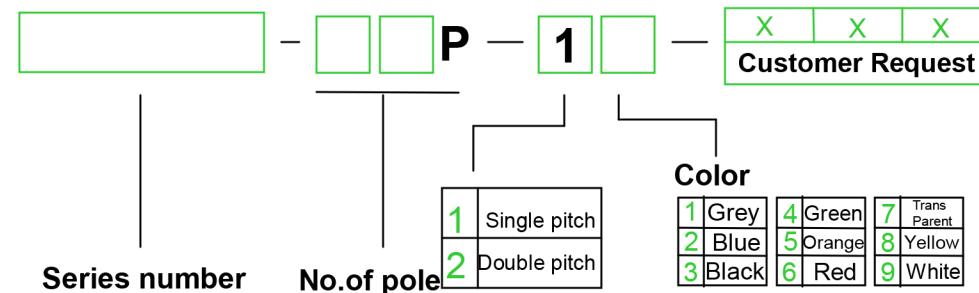

mm (INCH)	China · Kang Wei electronics co., LTD
THROANGLE PROJECTION	NAME 2EDGVM-5.0 2EDGVM-5.08