



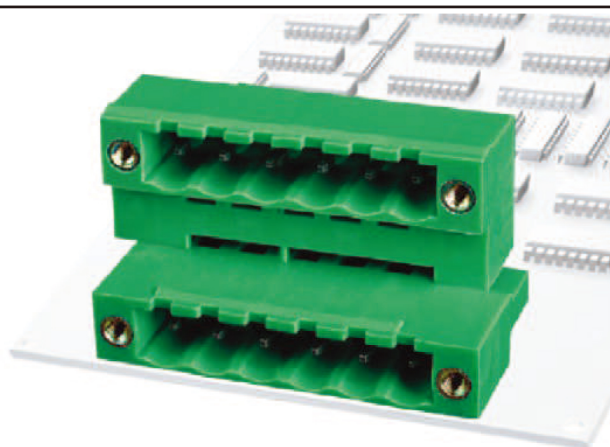


2EDGRTM-5.0
2EDGRTM-5.08

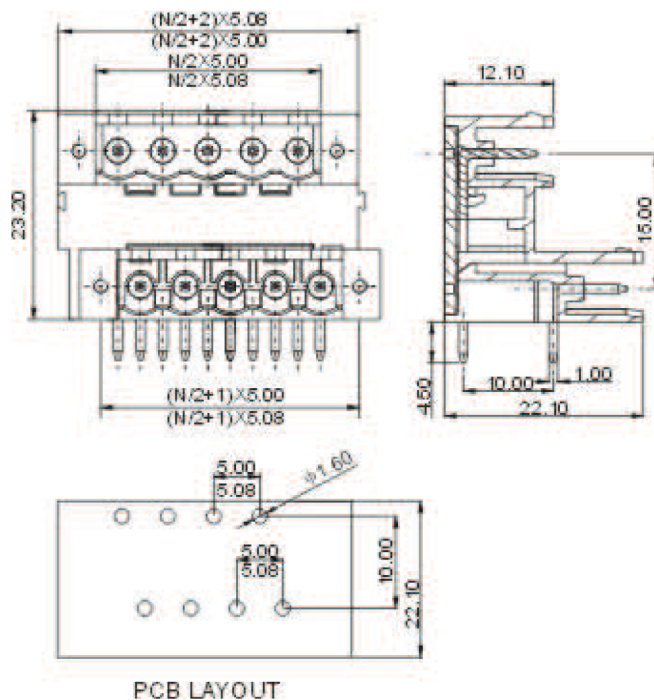

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	15A	10A
Withstanding voltage	AC2500V/1Min	
Mechanical		
Ambient temperature	-40℃~+105℃	
Dimensions		
Pitch	5.0mm(.197") 5.08mm(.200")	
Poles	2*(2P -24P)	
Material		
Housing	PA66,UL94 V-0	
Pin header	Brass,Tin plated	
Nut	M2.5,Brass	

HOW TO ORDER :

	-		P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request					
X	X	X														
Customer Request																
Series number		No. of pole					Color									
		1					<table border="1"> <tr> <td>1 Grey</td> <td>4 Green</td> <td>7 Trans Parent</td> </tr> <tr> <td>2 Blue</td> <td>5 Orange</td> <td>8 Yellow</td> </tr> <tr> <td>3 Black</td> <td>6 Red</td> <td>9 White</td> </tr> </table>	1 Grey	4 Green	7 Trans Parent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 White
1 Grey	4 Green	7 Trans Parent														
2 Blue	5 Orange	8 Yellow														
3 Black	6 Red	9 White														
		2														
		Single pitch														
		Double pitch														

	 China · Kang Wei electronics co., LTD
	NAME 2EDGRTM-5.0 2EDGRTM-5.08