

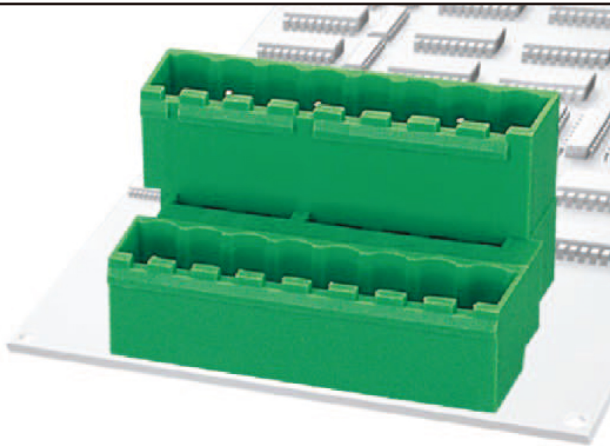
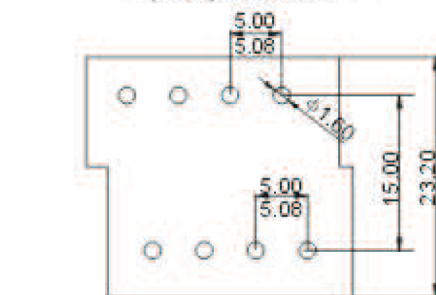




**2EDGVTC-5.0**  
**2EDGVTC-5.08**

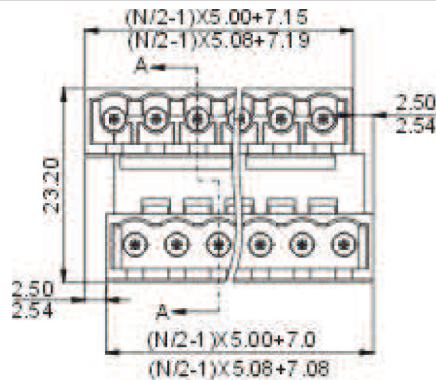

PCB LAYOUT

### APPROVAL

#### Electrical

Standard

Rated voltage

Rated current

Withstanding voltage

#### Mechanical

Ambient temperature

#### Dimensions

Pitch

Poles

#### Material

Housing

Pin header



UL

300V

15A

AC2500V/1Min

IEC

320V

10A

-40℃~+105℃

5.0mm(.197" ) 5.08mm(.200" )

2\*(2P -24P)

PA66,UL94 V-0

Brass,Tin plated

### HOW TO ORDER :

-  P -  - 
 

|                  |   |   |
|------------------|---|---|
| X                | X | X |
| Customer Request |   |   |


Series number

No. of pole

|   |              |
|---|--------------|
| 1 | Single pitch |
| 2 | Double pitch |

#### Color

|         |          |                |
|---------|----------|----------------|
| 1 Grey  | 4 Green  | 7 Trans Parent |
| 2 Blue  | 5 Orange | 8 Yellow       |
| 3 Black | 6 Red    | 9 White        |



China · Kang Wei electronics co., LTD

NAME

2EDGVTC-5.0 2EDGVTC-5.08