





2EDGRH-5.0
2EDGRH-5.08

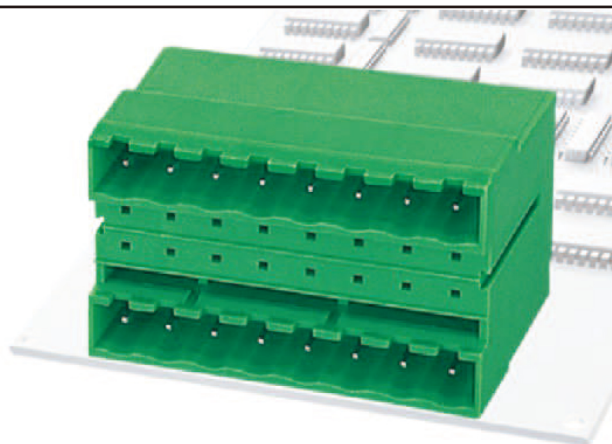

APPROVAL

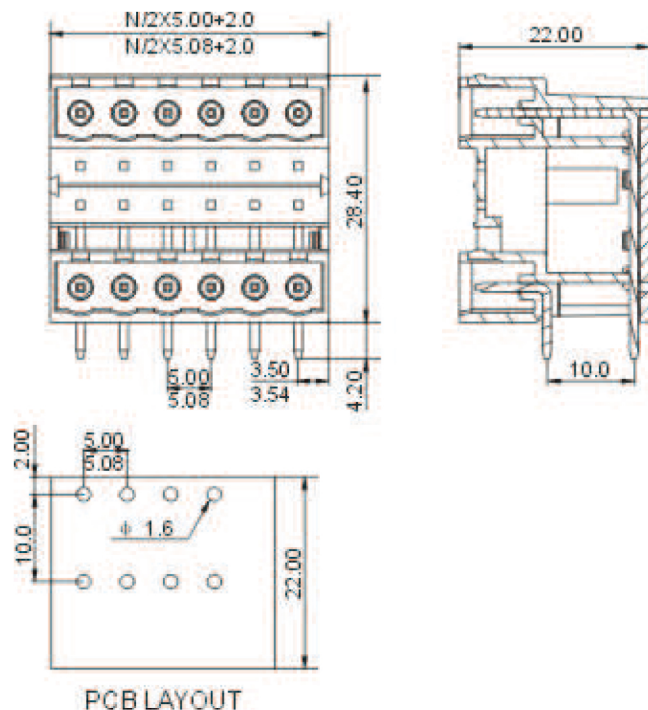

Electrical

Standard

UL

IEC

Rated voltage

300V

320V

Rated current

15A

10A

Withstanding voltage

AC2500V/1Min

Mechanical

Ambient temperature

-40℃~+105℃

Dimensions

Pitch

5.0mm(.197") 5.08mm(.200")

Poles

2*(2P -24P)

Material

Housing



PA66,UL94 V-0

Pin header

Brass,Tin plated

HOW TO ORDER :

	-	P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request		
X	X	X										
Customer Request												
Series number		No. of pole		Color								
		1		1 Grey	4 Green	7 Trans Parent						
		2		2 Blue	5 Orange	8 Yellow						
				3 Black	6 Red	9 White						



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGRH-5.0 2EDGRH-5.08