



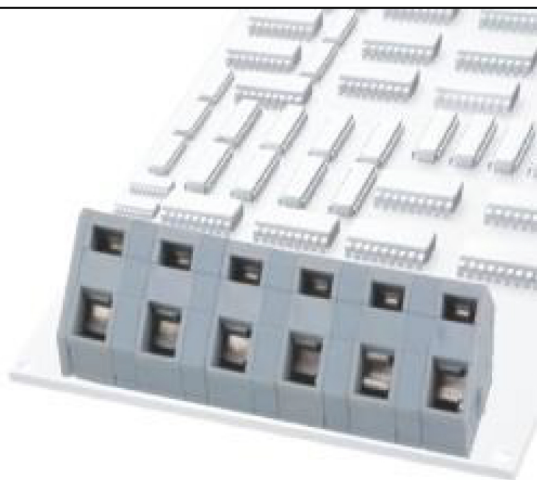

245-7.5
245-7.62

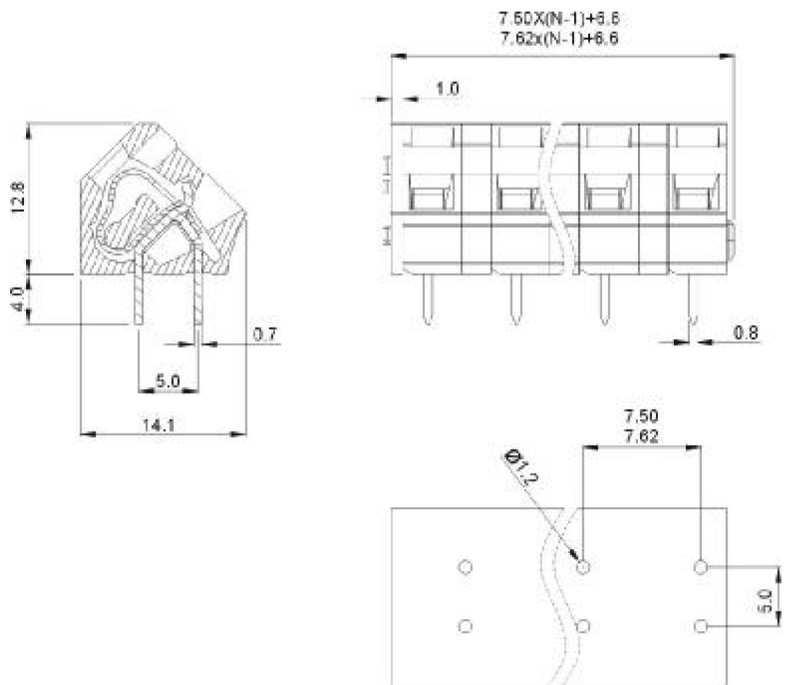

Approval	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	15A	17A
Wire range	28-12AWG	0.2-2.5mm ²
Withstanding voltage	AC3000V/1Min	
Mechanical		
Ambient temperature	-40℃~+105℃	
Strip length	5-6mm	
Dimensions		
Pitch	7.5mm(.295") 7.62 (.300")	
Poles	1P-XXP	
Material		
Housing	PA66,UL94V-0	
Pin header	Phosphor bronze,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

	-		P	-		-	☒ ☒ ☒ Customer Request
Series number		No. of pole					
		1 Single pitch 2 Double pitch				Color	
						1 Grey 4 Green 7 Trans Parent 2 Blue 5 Orange 8 Yellow 3 Black 6 Red 9 White	