



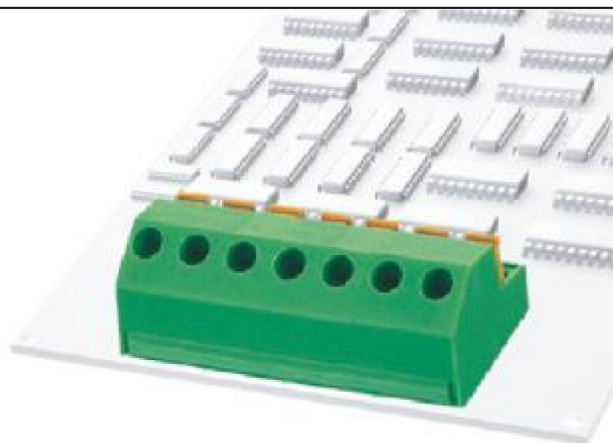

237-5.08

PCB LAYOUT

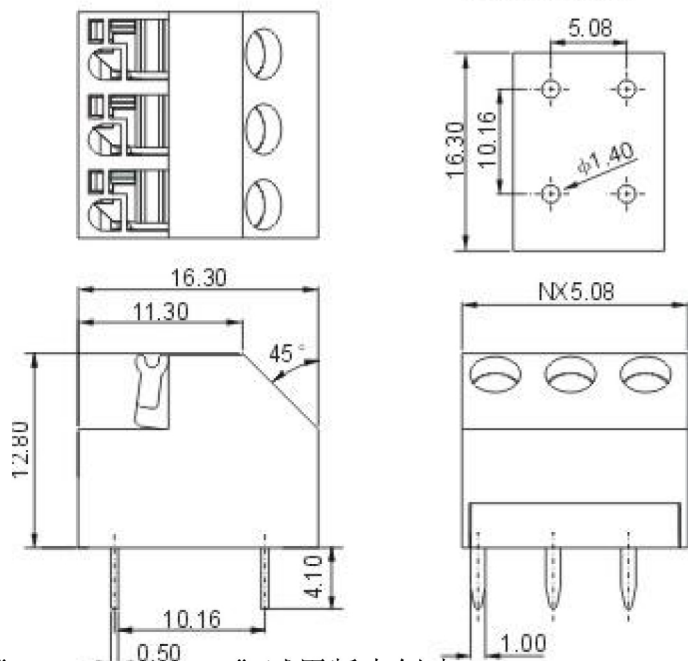


Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	10A	10A
Wire range	22-16AWG	0.2-1.5mm ²
Withstanding voltage	AC2500V/1Min	
Mechanical		
Ambient temperature	-40℃~+105℃	
Strip length	10mm	
Dimensions		
Pitch	5.08mm(.200")	
Poles	2P-7P	
Material		
Housing	PA66,UL94V-0	
Pin header	Brass,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

	-		P	-		-	
					1		X X X
							Customer Request

Series number	No.of pole	Color																						
	<table border="1"> <tr> <td>1</td> <td>Single pitch</td> </tr> <tr> <td>2</td> <td>Double pitch</td> </tr> </table>	1	Single pitch	2	Double pitch	<table border="1"> <tr> <td>1</td> <td>Grey</td> <td>4</td> <td>Green</td> <td>7</td> <td>Trans Parent</td> </tr> <tr> <td>2</td> <td>Blue</td> <td>5</td> <td>Orange</td> <td>8</td> <td>Yellow</td> </tr> <tr> <td>3</td> <td>Black</td> <td>6</td> <td>Red</td> <td>9</td> <td>White</td> </tr> </table>	1	Grey	4	Green	7	Trans Parent	2	Blue	5	Orange	8	Yellow	3	Black	6	Red	9	White
1	Single pitch																							
2	Double pitch																							
1	Grey	4	Green	7	Trans Parent																			
2	Blue	5	Orange	8	Yellow																			
3	Black	6	Red	9	White																			

 mm (INCH)	 China · Kang Wei electronics co., LTD
 THIRD ANGLE PROJECTION	NAME 237-5.08