


Approval	UL [®] US		VDE
Electrical			
Standard	UL	IEC	
Rated voltage	300V	450V	
Rated current	10A	12A	
Wire range	28-12AWG	2.5mm ²	
Withstanding voltage	AC2500V/1Min		
Mechanical			
Ambient temperature	-40℃~+105℃		
Strip length	5-6mm		
Dimensions			
Pitch	5.0mm(.197") 5.08 (.200")		
Poles	2 x (1P-XXP)		
Material			
Housing	PA66,UL94V-0		
Pin header	Phosphor bronze and Red Copper,Tin plated		
Wire guard	Stainless steel		

HOW TO ORDER :

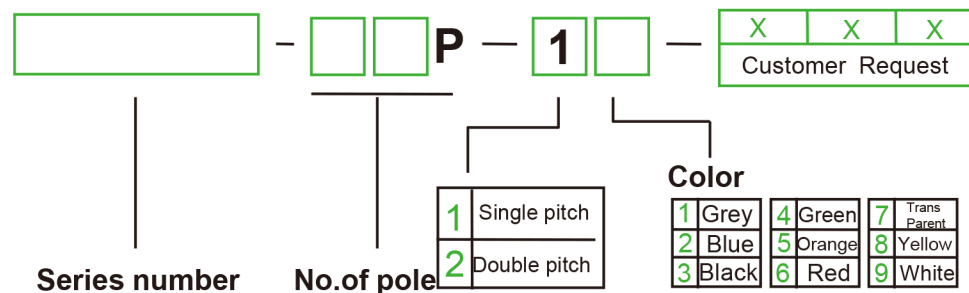

	 China · Kang Wei electronics co., LTD
 THIROANGLE PROJECTION	NAME 245H2-5.0, 245H2-5.08