

China · Kang Wei electronics co., LTD


Product Specification




235-3.81
235-3.96

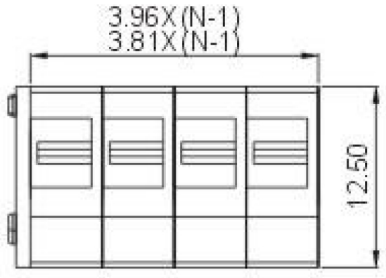



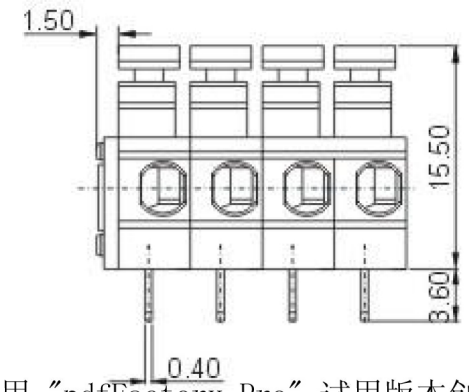

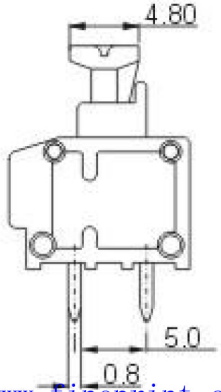

Approval	cULus	VDE
Electrical		
Standard	**UL**	**IEC**
Rated voltage	300V	250V
Rated current	5A	10A
Wire range	20-18AWG	1.5mm²
Withstanding voltage	AC2000V/1Min	
Mechanical		
Ambient temperature	-40℃~+105 ℃	
Strip length	9-10mm	
Dimensions		
Pitch	3.81mm(.150″) 3.96mm (.156″)	
Poles	1P-XXP	
Material		
Housing	PA66,UL94V-0	
Pin header	Phosphor bronze,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :

[ ] – [ ][ ]P – 1[ ] – [X][X][X] Customer Request

Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

mm (INCH)

THIRDANGLE PROJECTION

China · Kang Wei electronics co., LTD

NAME 235-3.81, 235-3.96

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.cn