

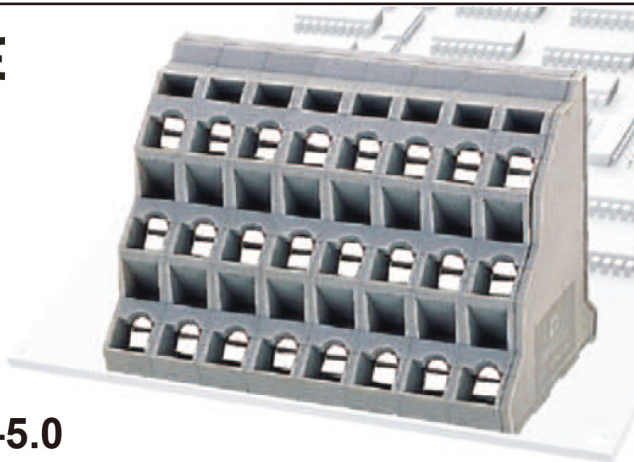
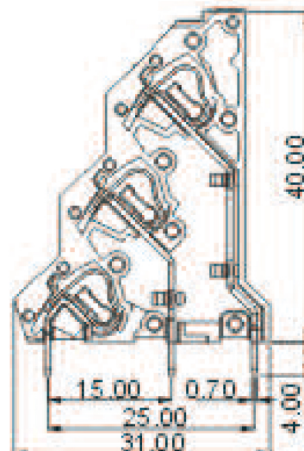


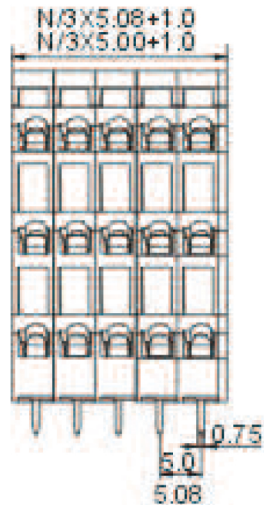

245H3-5.0

245H3-5.08

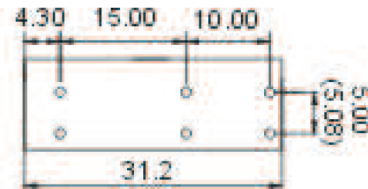

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

450V

10A

12A

28-12AWG

2.5mm²

AC2500V/1Min

Mechanical

Ambient temperature

Strip length

-40℃~+105℃

5-6mm

Dimensions

Pitch

Poles

5.0mm(.197") 5.08 (.200")

2 x (1P-XXP)

Material

Housing

Pin header

Wire guard

PA66,UL94V-0

Phosphor bronze and Red Copper,Tin plated

Stainless steel

HOW TO ORDER :

	-		P	-		-	
							Customer Request



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

245H3-5.0

245H3-5.08