


Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	22.16	31.66	41.16	50.66	60.16	69.66	79.16	88.66	98.16	107.66	117.16	126.66	136.16	145.66
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.50
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	155.16	164.66	174.16	183.66	193.16	202.66	212.16	221.68	231.16	240.66	250.16			
S(mm)	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00	237.50			

Approval	UL US		CE
Electrical			
Standard	UL	IEC	
Rated voltage	300V	450V	
Rated current	20A	32A	
Wire range	22-12AWG	4.0mm <sup>2</sup>	
With standing voltage	AC2000V/1Min		
Insulation Resistance	500MΩ /DC500V		
Mechanical			
Max. Torque Value	1.2N.m 10.6Lb.in		
Ambient temperature	-40℃~+105℃		
Dimensions			
Pitch	9.5mm(.375" )		
Poles	2P-22P		
Material			
Housing	PA66+23%GF,UL94V-0		
Terminal	Brass,0.8t Tin plated		
Screws	Steel,M4 Ni plated		

### HOW TO ORDER :

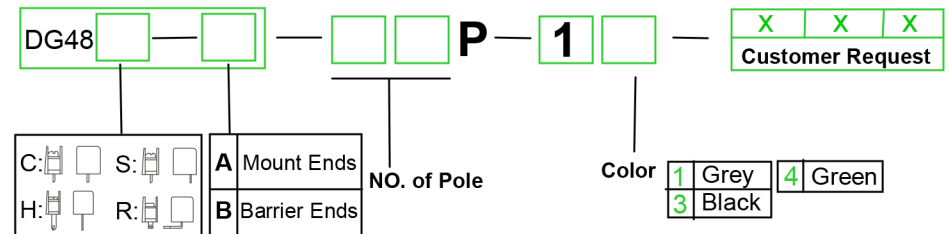

	China · Kang Wei electronics co., LTD
THIRD ANGLE PROJECTION	<b>NAME</b> <b>45GS-B</b>