



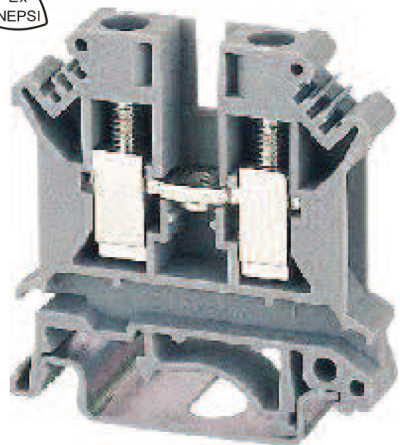

UK6N

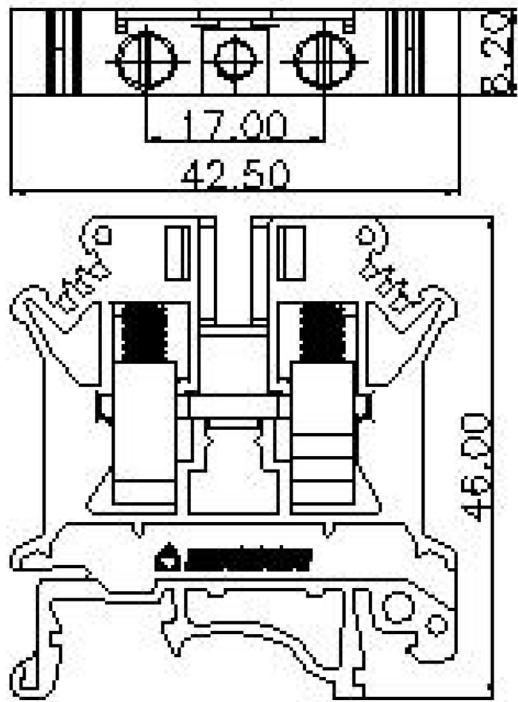

Approval	 	
Capability		
Standard	UL	IEC
Rated Voltage	600V	800V
Rated Current	50A	41A
Wire size	24-8AWG	0.2-6.0mm ²
T/W/End plate	6.2/42.5/1.6mm	
Height(mm)(NS35:7.5/NS35:15/NS32)	47/54.5/52mm	
Rated surge voltage/Contamination Class	8KV/3	
Stripping length	10mm	
Screw thread/Tightening torque	M4/1.2N.m/10.5Lb-in	
Internal cylindrical gage	A5	
Insulating Material/Inflammability class	PA/V-0	
Specification	Model	Pieces
(1)Terminal block	PC 6	50
(2)End cover	D-PC 2.5	50
(3)Fixed bridge	FBI 2-8	150
	FBI 3-8	50
	FBI 5-8	10
	FBI 10-8	10
(4)Step bracket		
	EB 2-8	100
	EB 3-8	100
	EB 10-8	50
(5)Insertion bridge	ISSBI 10-8	10
(6)Isolator bridge bar, 10P	IS-K10	100
(7)Bridge bar isolator	SB 2-8/13N	1
(8)Switching bridge	TS-K	1000
(9)Separating plate	ATP-PC	50
(10) Separating plate, width 1.5mm	DSB 4/7/6	100
(11)Test plug socket	DSBJ 4/15/6	
(12)Test plug socket insulated	ZB8	300
(13)Zack strip		

HOW TO ORDER :

Series No.

-

No. of pole

-

1

Color

-

X X X

Customer Request

1 Gray

2 Blue

3 Black

4 Green

5 Orange

6 Red

7 Transp-arent

8 Yellow

9 white