

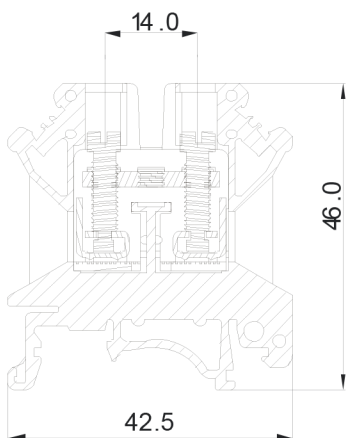


CE

UKIK 16



Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15/NS32)

Rated surge voltage/Contamination class

Stripping length

Screw thread/Tightening torque

Internal cylindrical gage

Insulating material/Inflammability class

UL

300V

85A

24-4AWG

IEC

400V

76A

4-16mm²

12.2/42.5/1.8mm
47/54.5/52mm

6KV/3

11mm

M4/1.2N.m/10.5Lb-in

B7

PA/V-0

Specification

(1)Terminal block

(2)Cover

(3)Fixed bridge

(4)Insertion bridge

(5)Switching bridge

(6)Separating plate

(7)Partition plate

(8)Test plug socket

(9)Test plug socket insulated

(13)Zack strip

2P

3P

10P

2P

3P

10P

2P

3P

10P

2P

3P

10P

2P

3P

10P

Model

PCIK 16

D-PCIK 16

FBI 10-12

EB 10-12

TS-K3

ATP-PC

DSB 4/7/6

DSBJ 4/15/6

ZB10

Pieces

50

150

100

50

50

100

100

200

HOW TO ORDER :

- P - -

X	X	X
Customer Request		

Series No. No. of pole Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

UKIK 16