
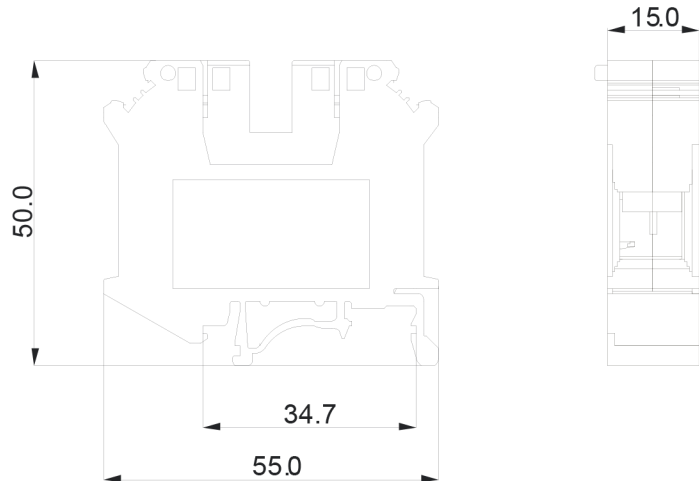


Approval			
Electrical			
Standard	UL	IEC	
Rated voltage	600V	600V	
Rated current	115A	125A	
Wire size	18-2AWG	0.75-35mm ²	
T/W/End plate		15.2/55/-mm	
Height(NS35:7.5/NS35:15/NS32)		51/58.5/59mm	
Rated surge voltage/Contamination class		8KV/3	
Stripping length		16mm	
Screw thread/Tightening torque		M6/2.5N.m/22Lb-in	
Internal cylindrical gage		B9	
Insulating material/Inflammability class		PAV-0	



HOW TO ORDER :

- **P** - -

X	X	X
Customer Request		

Series No. No. of pole Color

1	Gray	4	Green	7	Transp-arent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	white

	 China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	NAME UKIK 35