



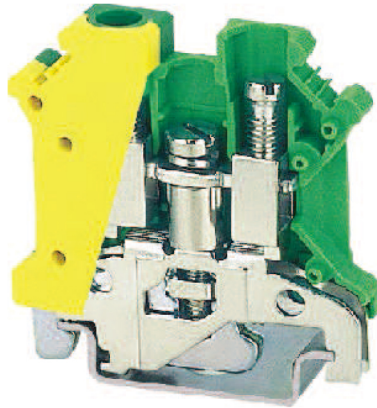

UK6-PE

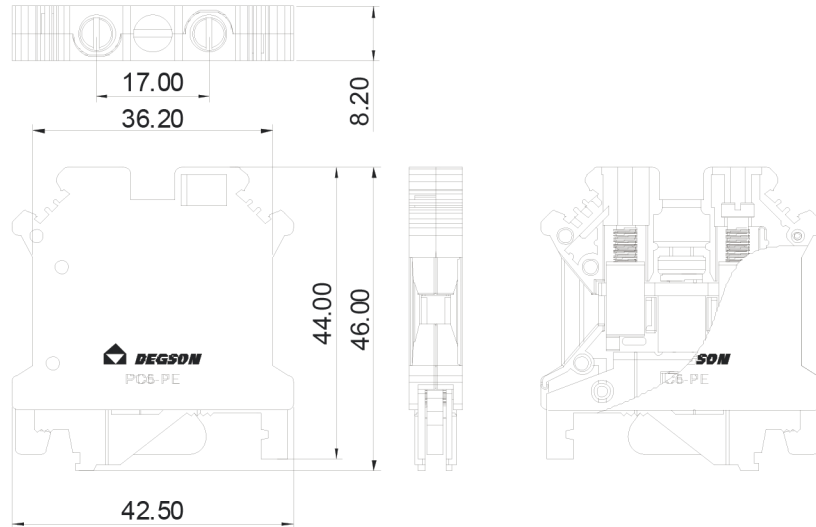

Approval

UL US



Capability

Standard

UL

IEC

Rated Voltage

—

—

Rated Current

—

—

Wire size

24-10AWG

0.2-6.0mm²

T/W/End plate

8.2/42.5/-mm

Height(mm)(NS35:7.5/NS35:15/NS32)

47/54.5/52mm

Rated surge voltage/Contamination Class

8KV/3

Stripping length

8mm

Terminal screw: thread/torque

M4/1.2N.m/10.5Lb-in

Mounting screw: thread/torque

M4/1.2N.m/10.5Lb-in

Internal cylindrical gage

A4

Insulating Material/Inflammability class

PAV-0

Specification

(1)Ground terminal block

Model

PC 6-PE

Pieces

50

(2)Zack strip




ZB 8

300

HOW TO ORDER :

	-	P	-		-	<table border="1"> <tr> <td>X</td> <td>X</td> <td>X</td> </tr> <tr> <td colspan="3">Customer Request</td> </tr> </table>	X	X	X	Customer Request					
X	X	X													
Customer Request															
Series No.		No. of pole		Color		<table border="1"> <tr> <td>1 Gray</td> <td>4 Green</td> <td>7 Transp-arent</td> </tr> <tr> <td>2 Blue</td> <td>5 Orange</td> <td>8 Yellow</td> </tr> <tr> <td>3 Black</td> <td>6 Red</td> <td>9 white</td> </tr> </table>	1 Gray	4 Green	7 Transp-arent	2 Blue	5 Orange	8 Yellow	3 Black	6 Red	9 white
1 Gray	4 Green	7 Transp-arent													
2 Blue	5 Orange	8 Yellow													
3 Black	6 Red	9 white													



China · Kang Wei electronics co., LTD

NAME

UK6-PE