


Approval			
Electrical			
Standard	UL	IEC	
Rated voltage	300V	500V	
Rated current	20A	24A	
Wire size	24-12AWG	0.2-2.5mm ²	
T/W/End plate		5.2/47.5/1.5mm	
Height(NS35:7.5/NS35:15/NS32)		58.5/66/63.5mm	
Rated surge voltage/Contamination class		6KV/3	
Stripping length		8mm	
Screw thread/Tightening torque		M3/0.5N.m/4.5Lb-in	
Internal cylindrical gage		A3	
Insulating material/Inflammability class		PAV-0	

HOW TO ORDER :

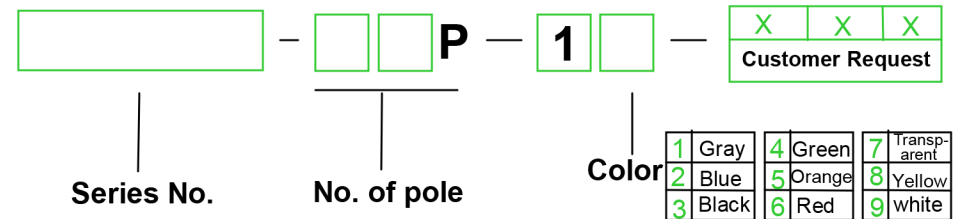

	 China · Kang Wei electronics co., LTD
 THIRD ANGLE PROJECTION	NAME UK 2.5-RE