
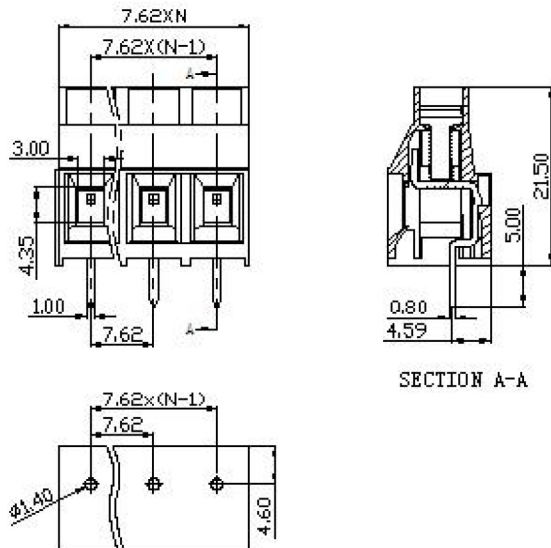


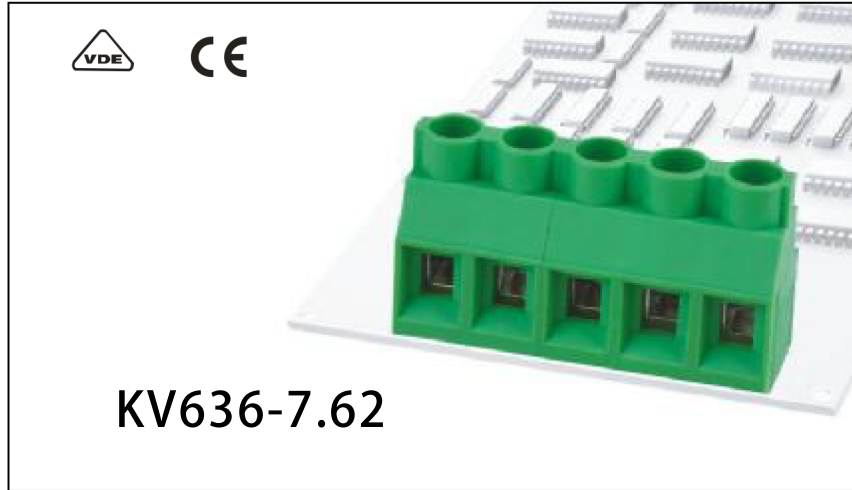

APPROVAL	VDE	
Electrical		
Standard	UL	IEC
Rated voltage	300V	630V
Rated current	30A	32A
Wire range	26-10AWG	4.0mm ²
Withstanding voltage	AC3000V/1Min	

Mechanical		
Torque	0.5Nm(4.4Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	8mm	
Dimensions		
pitch	7.62mm(.300")	
Poles	2P,3P-24P	

Material		
Housing	PA66,UL94V-0	
Screws	M3,Steel, Cr ³⁺ Znplated	
Pin header	Brass,Tin-plated	
Cage	Brass,Ni-plated	

HOW TO ORDER :

	-	P	-		-	
Series number		No. of pole				Customer Request
				1		
				1	Single pitch	
				2	Double pitch	
						Color
						1 Grey
						2 Blue
						3 Black
						4 Green
						5 Orange
						6 Red
						7 Trans Parent
						8 Yellow
						9 White

mm (INCH)	 China · Kang Wei electronics co., LTD
THIROANGLE PROJECTION	NAME KV636-7.62