



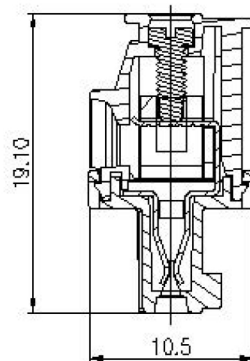

2EDGKB-3.5/3.81

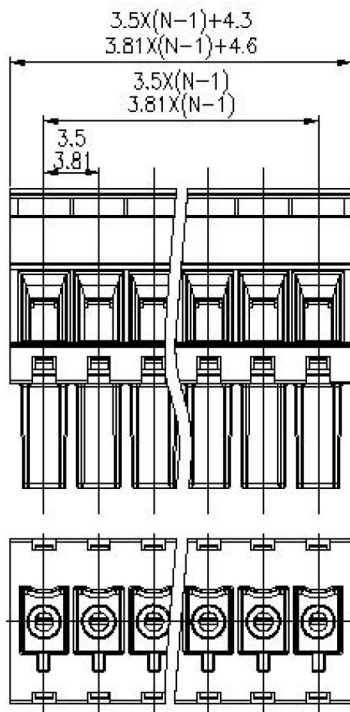

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Rated impulse voltage



UL

IEC

300V

250V

8A

7A

28-16AWG

0.5-1.5mm²

2.5KV

Mechanical

Torque

0.2Nm(1.7Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

7mm

Dimensions

Pitch

3.5mm(.138") 3.81mm(.150")

Poles

2P-24P

Material

Housing

PA66,UL94V-0

Screws

M2,Steel,Cr³⁺Zn-plated

Contact


Phosphor bronze

Cage

Brass,Ni-plated

HOW TO ORDER :

	-	P	-	1	-	X X X
						Customer Request
Series number		No. of pole		Color		
		1 Single pitch		1 Grey	4 Green	7 Trans Parent
		2 Double pitch		2 Blue	5 Orange	8 Yellow
				3 Black	6 Red	9 White



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGKB-3.5/3.81