

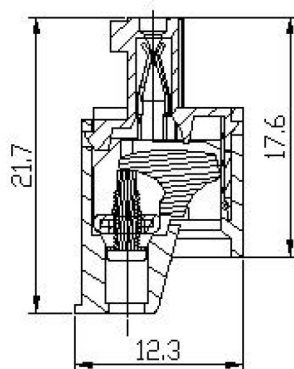


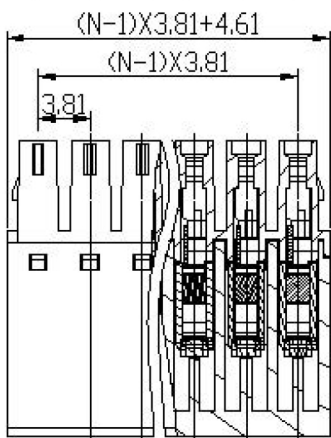

2EDGKC-3.81



APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Rated impulse voltage



UL

300V

8A

28-16AWG

2.5KV

IEC

250V

7A

0.5-1.5mm²

Mechanical

Torque

0.2Nm(1.7Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

9mm

Dimensions

Pitch

3.81mm(.150")

Poles

2P-24P

Material

Housing

PA66,UL94V-0

Screws

M2,Steel,Cr³⁺Zn-plated

Contact

Phosphor bronze

Cage

Steel,Cr³⁺Zn-plated

HOW TO ORDER :





Series number

No. of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGKC-3.81