

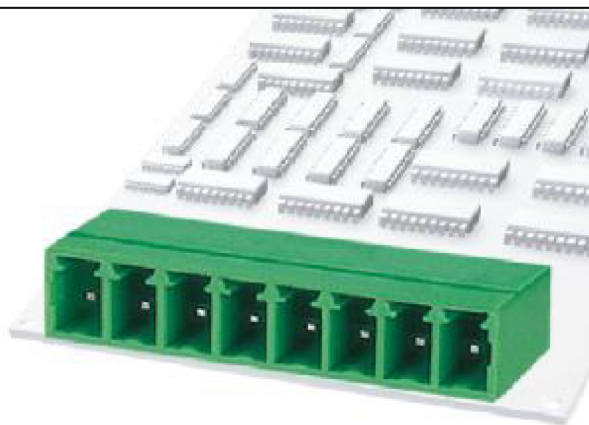






2EDGRC-3.5/3.81

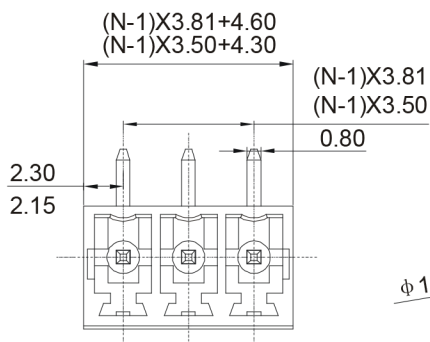

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Rated impulse voltage

Mechanical

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Pin header



UL

IEC

300V

250V

8A

7A

2.5KV

-40°C~+105 °C

3.5mm(.138") 3.81mm(.150")

2P-24P

PA66,UL94V-0

Brass,Tin-plated

HOW TO ORDER :

- P - -

X	X	X
Customer Request		

Series number


No.of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

mm
(INCH)



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGRC-3.5/3.81