

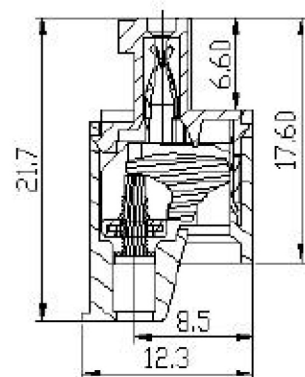


2EDGKCM-3.81

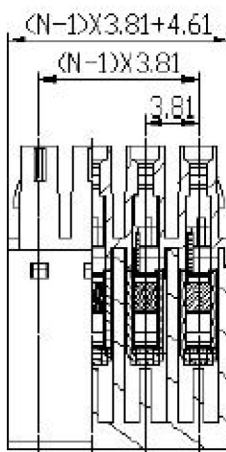

APPROVAL



Electrical

Standard

UL

IEC

Rated voltage

300V

250V

Rated current

8A

7A

Wire range

28-16AWG

0.5-1.5mm²

Rated impulse voltage

2.5KV

Mechanical

Torque

0.2Nm(1.7Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

9mm

Dimensions

Pitch

3.81mm(.150")

Poles

2P-20P

Material

Housing

PA66,UL94V-0

Screws

M2,Steel,Cr³⁺Zn-plated

Contact

Phosphor bronze

Cage

Steel,Cr³⁺Zn-plated

HOW TO ORDER :

- P - 1 -

X	X	X
Customer Request		

Series number


No. of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

mm
(INCH)



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

2EDGKCM-3.81