


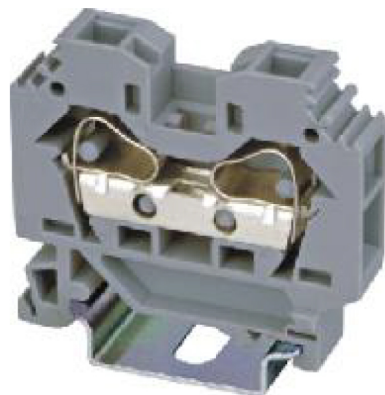

WD2-10

Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15)

Rated surge voltage/contamination class

Stripping length

Insulating material/Inflammability class

UL

600V

50A

24-8AWG

IEC

800V

57A

0.2-10mm²

10/52/2.5mm

49/56.5mm

8KV/3

18mm

PAV-0

HOW TO ORDER :

- **P** - **1** -

X	X	X
Customer Request		

Series No.

No. of pole

Color

1	Gray	4	Green	7	Trans- parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	white

mm
(INCH)



THIROANGLE PROJECTION