




HB950G

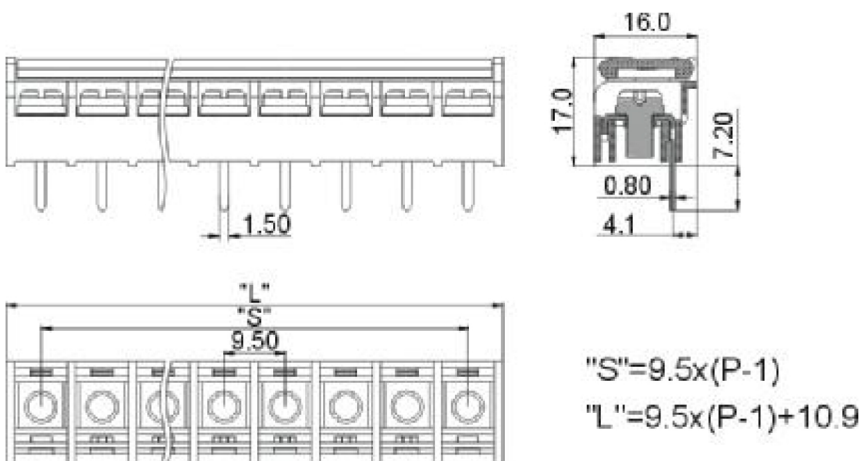

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	20.40	29.90	39.40	48.90	58.40	67.90	77.40	86.90	96.40	105.90	115.40	124.90	134.40	143.90
S(mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00	123.50	133.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	153.40	162.90	172.40	181.90	191.40	200.90	210.40	219.90	229.40	238.90	248.40			
S(mm)	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	228.00	237.50			

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

With standing voltage

Insulation Resistance

Mechanical

Max. Torque Value

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Terminal

Screws



UL

300V

20A

22-12AWG

AC2000V/1Min

500MΩ /DC500V

IEC

450V

32A

4.0mm²

1.2N.m 10.6Lb.in

-40℃~+105℃

9.5mm(.375")



2P-12P

PA66,UL94V-0

Brass,0.8t Tin plated

Steel,M4 Ni plated

HOW TO ORDER :

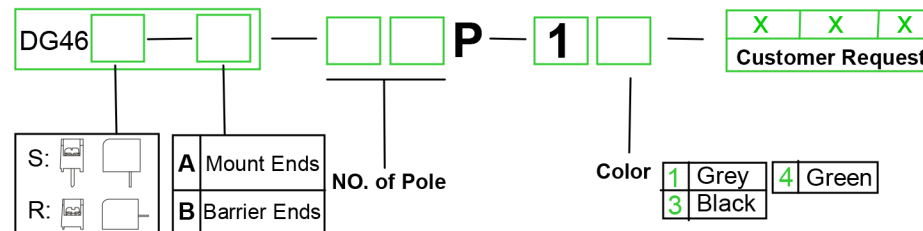

China · Kang Wei electronics co., LTD

NAME

HB950G