




KV89-A

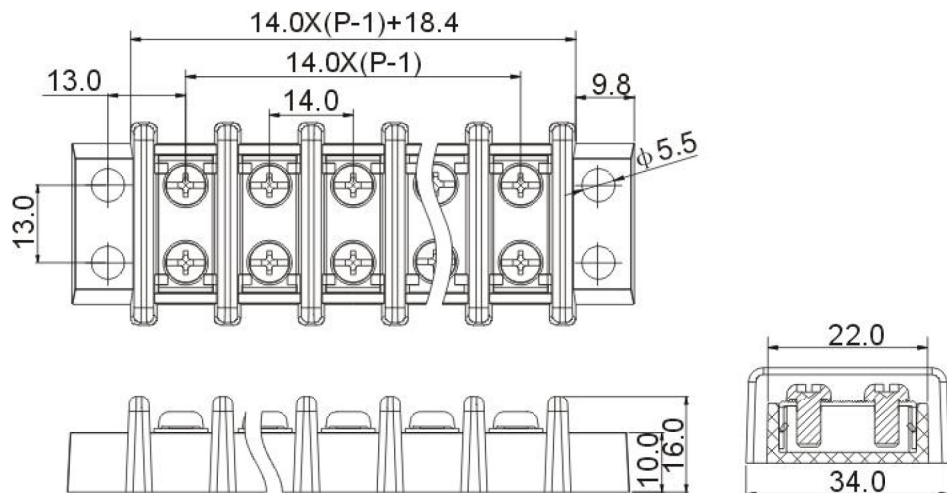

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

With standing voltage

Insulation Resistance

Mechanical

Max. Torque Value

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Terminal

Screws



UL

600V

30A

22-10AWG

AC3000V/1Min

1000M Ω /DC500V

IEC

450V

41A

6.0mm²

1.2N.m 10.6Lb.in

-40 $^{\circ}$ C~+80 $^{\circ}$ C

14.0mm(.551")

2P-18P

PC,UL94V-2

Brass,0.8t Tin plated

Steel,M4 Ni plated

HOW TO ORDER :

Ordering code format: — P — 1 — Customer Request

Series No. NO. of Pole Color

Color options: 1 Grey, 3 Black, 4 Green

mm
(INCH)



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

KV89-A