




KV1450S-35-双针



Approval

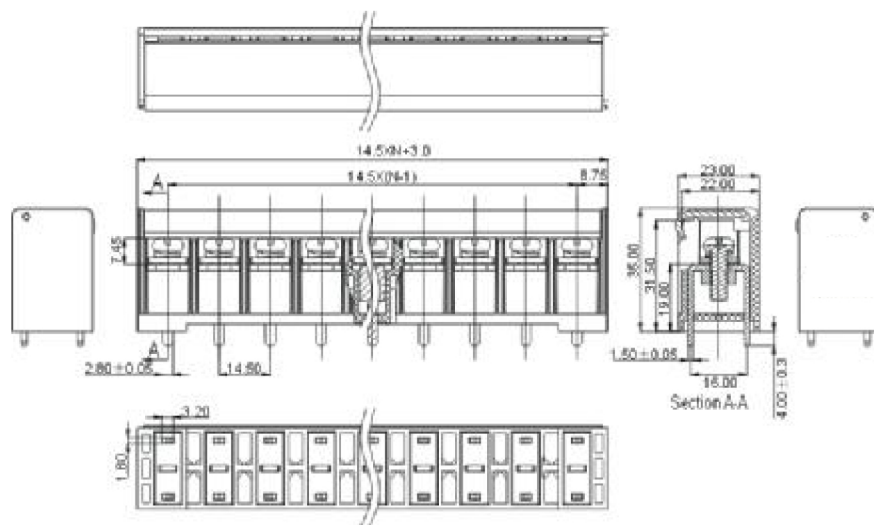

Electrical

Standard

Rated voltage

UL

300V

IEC

600V

Rated current

50A

45A

Wire range

22-8AWG

10.0mm²

With standing voltage

AC3500V/1Min

Insulation Resistance

5000M Ω /DC500V

Mechanical

Max. Torque Value

2.0N.m 17.5Lb.in

Ambient temperature

-40℃~+140℃

Dimensions

Pitch

14.5mm(.571")

Poles

2P-14P

Material

Housing

PBT+20%GF,UL94V-0

Terminal


Brass, 1.0t Tin plated

Screws

Steel, M5 Ni plated

HOW TO ORDER :

	—	P	—	1	—	X X X
Series No.		NO. of Pole		Color		Customer Request
				1 Grey 3 Black	4 Green	



China · Kang Wei electronics co., LTD

NAME

KV1450S-35-双针