
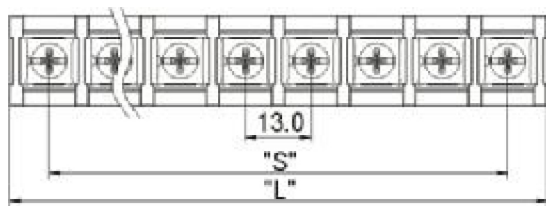



KV75GC-B


$$S = 13.0X(P-1)$$
$$L = 13.0XP + 3.3$$


Approval

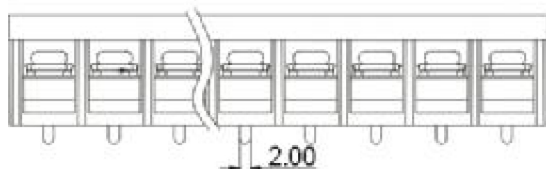

Electrical

Standard

Rated voltage

Rated current

Wire range

With standi

Insulation Resistance

Mechanical

Mechanical

Max. Torque Value

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Terminal

Screws

PA66+23%GF,UL94V-0

Brass, 1.0t Tin plated

Steel,M4 Ni plated

HOW TO ORDER :

DG78 — P — 1 —


X	X	X
Customer Request		

C: 	S: 	A Mount Ends
H: 	R: 	B Barrier Ends

NO. of Pole

Color	1	Grey	4	Green
	3	Black		

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	29.30	42.30	55.30	68.30	81.30	94.30	107.30	120.30	133.30	146.30	159.30	172.30	185.30	198.30
S(mm)	13.00	26.00	39.00	52.00	65.00	78.00	91.00	104.00	117.00	130.00	143.00	156.00	169.00	182.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	211.30	224.30	237.30	250.30	263.30	276.30	289.30	302.30	315.30	328.30	341.30			
S(mm)	195.00	208.00	221.00	234.00	247.00	260.00	273.00	286.00	299.00	312.00	325.00			



THROANGLE PROJECTION



 China · Kang Wei electronics co., LTD

NAME _____

KV75GC-B