




KV49-A

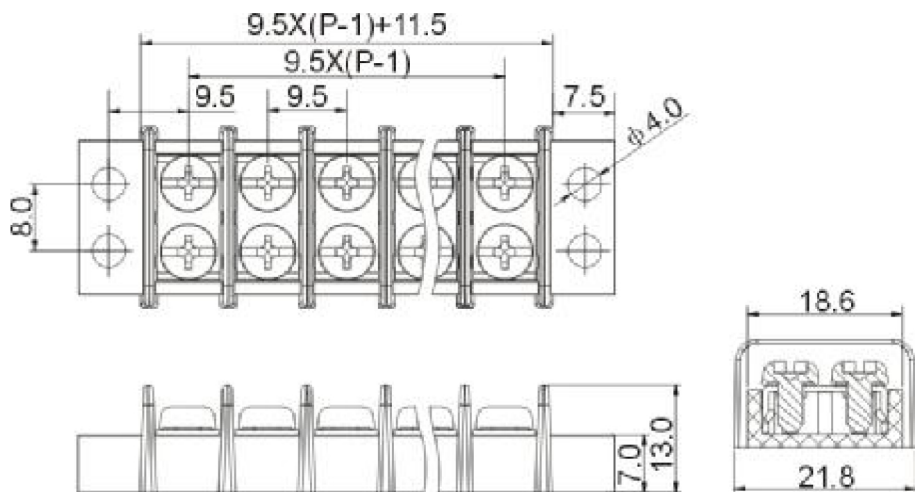

Approval

Electrical

Standard

Rated voltage

Rated current

Wire range

With standing voltage

Insulation Resistance

Mechanical

Max. Torque Value

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Terminal

Screws



UL

300V

20A

22-12AWG

AC2500V/1Min

1000M Ω /DC500V

IEC

250V

32A

4.0mm²

0.8N.m 7.0Lb.in

-40℃~+80℃

9.5mm(.375")

2P-24P

PC,UL94V-2

Brass,0.8t Tin plated

Steel,M3.5 Ni plated


HOW TO ORDER :

— P — 1 — X X X
 Customer Request

Series No. NO. of Pole Color

1 Grey 4 Green
 3 Black

mm
(INCH)



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

KV49-A