





CE

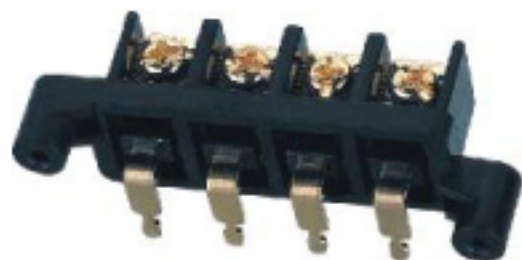

KV13-A

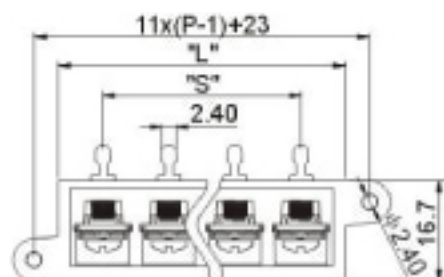


"S" = 11x(P-1)
"L" = 11x(P-1)+15

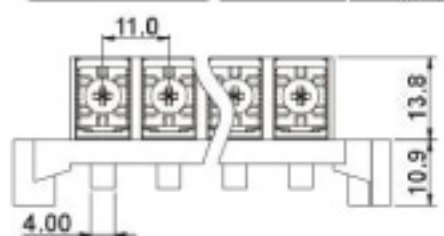

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	26.00	37.00	48.00	59.00	70.00	81.00	92.00	103.00	114.00	125.00	136.00	147.00	158.00	169.00
S(mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.00	121.00	132.00	143.00	154.00
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	180.00	191.00	202.00	213.00	224.00	235.00	246.00	257.00	268.00	279.00	290.00			
S(mm)	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00	11.00

APPROVAL	UL Certification Link	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	30A	41A
Wire range	18-10AWG	6.0mm ²
Withstand Voltage	AC2000V/Min	
Insulation Resistance	1000MΩ/DC500V	
Mechanical		
Max.Torque Value	1.2Nm 10.6Lb.in	
Ambient temperature	-40°C ~ +80°C	
Dimensions		
Pitch	PC UL 94V-2	
Poles	2P-11P	
Material		
Housing	PC UL 94V-2	
Terminal	Brass,1.2t, Gold plated	
Screws	Steel,M4 Gold plated	

HOW TO ORDER :





Series number

No. of pole

Color

1 Grey	4 Green	7 Trans. Paint
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



China · Kang Wei electronics co., LTD

NAME

KV13-A