

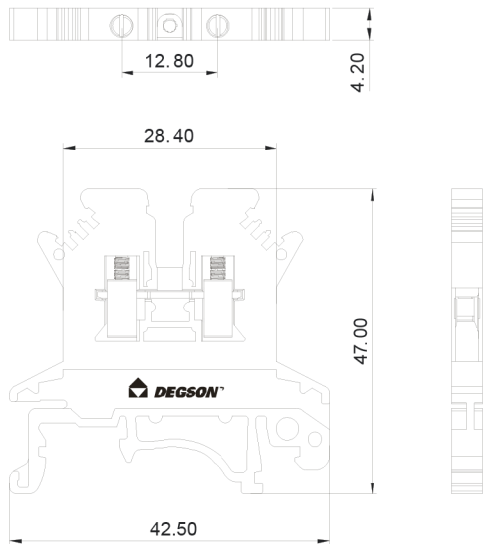


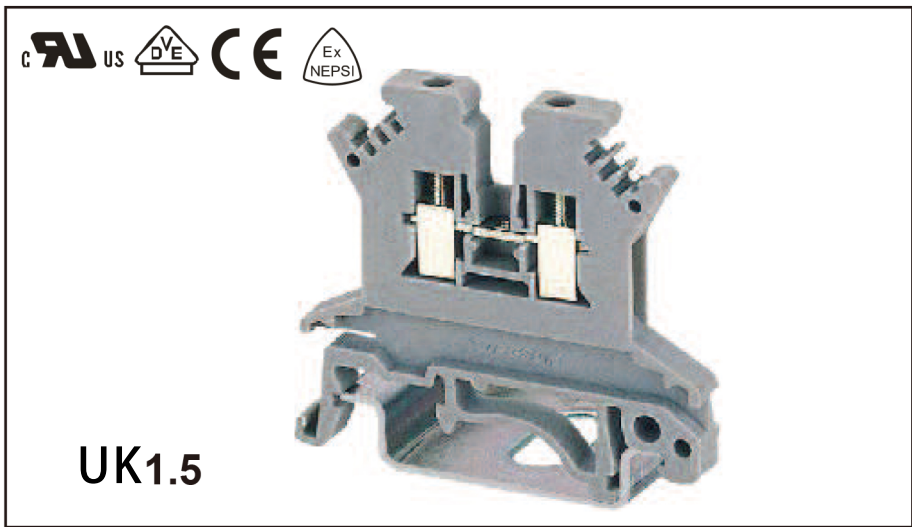

Approval
Capability
Standard
Rated Voltage
Rated Current
Wire size
T/W/End plate
Height(mm)(NS35:7.5/NS35:15/NS32)
Rated surge voltage/Contamination Class
Stripping length
Screw thread/Tightening torque
Internal cylindrical gage
Insulating Material/Inflammability class

Specification
(1)Terminal block
(2)End cover
(3)Fixed bridge
(4)Step bracket
(5)Insertion bridge
(6)Isolator bridge bar,10P
(7)Bridge bar isolator
(8)Switching bridge
(9)Separating plate
(10)Separating plate. width 1.5mm
(11)Test plug socket
(12)Test plug socket insulated
(13)Zack strip

UL	IEC
600V	500V
10A	17.5A
26-16AWG	0.2-1.5mm ²
4.2/42.5/1.5mm	
42/49.5/47mm	
6KV/3	
7mm	
M2/0.2N.m/1.73Lb-in	
A1	
PA/V-0	
Model	Pieces
PC 1.5	50
D-PC 1.5	800
FBRI 10-4	500
ATP-PC	50
ZB4	900

HOW TO ORDER :

Series No.

No. of pole

1

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

X X X

Customer Request