


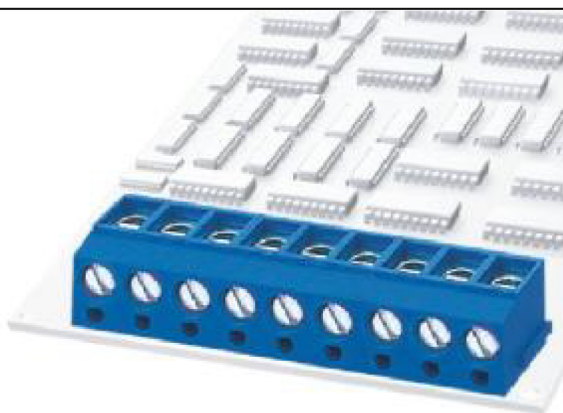
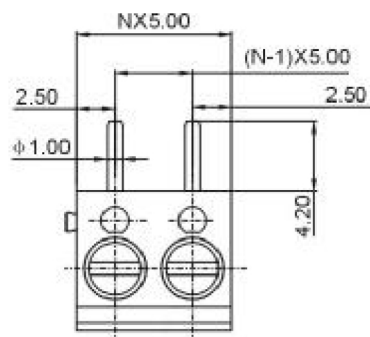




KV300R-5.0



PCB LAYOUT



APPROVAL



Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	24A
Wire range	22-14AWG	2.5mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical

Torque	0.5Nm(4.4Lb-In)
Ambient temperature	-30℃~+120℃


Dimensions

Pitch	5.0mm(.197")
Poles	2P, 3P-24P

Material

Housing	PBT,UL94V-0
Screws	M3,steel, Cr ³⁺ Zn-plated
Pin header	Brass,Tin plated
Wire guard	Stainless steel

HOW TO ORDER :

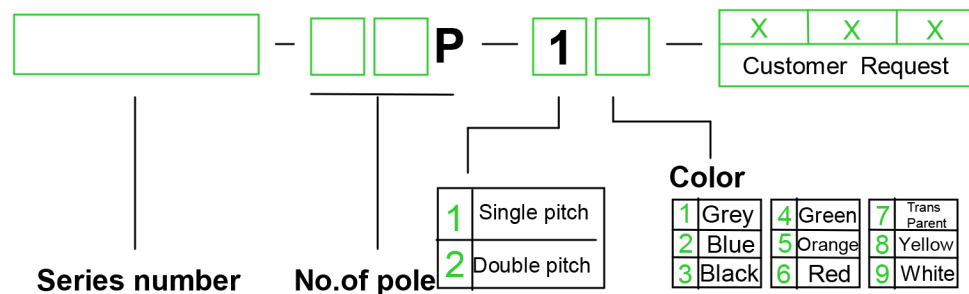

	 China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	NAME KV300R-5.0