


|                      |  |                    |
|----------------------|--|--------------------|
| <b>APPROVAL</b>      |  |                    |
| <b>Electrical</b>    |  |                    |
| Standard             | <b>UL</b>                              | <b>IEC</b>         |
| Rated voltage        | 300V                                   | 450V               |
| Rated current        | 15A                                    | 20A                |
| Wire range           | 22-14AWG                               | 2.5mm <sup>2</sup> |
| Withstanding voltage | AC2500V/1Min                           |                    |
| <b>Mechanical</b>    |  |                    |
| Torque               | 0.4Nm(3.5Lb-In)                        |                    |
| Ambient temperature  | -30°C~+120 °C                          |                    |
| Strip length         | 5-6mm                                  |                    |
| <b>Dimensions</b>    |  |                    |
| Pitch                | 7.5mm(.295" )                          |                    |
| Poles                | 2P,3P-24P                              |                    |
| <b>Material</b>      |  |                    |
| Housing              | PBT,UL94V-0                            |                    |
| Screws               | M2.5,steel, Cr <sup>3+</sup> Zn-plated |                    |
| Pin header           | Brass,Tin plated                       |                    |
| Wire guard           | Stainless steel                        |                    |

### HOW TO ORDER :

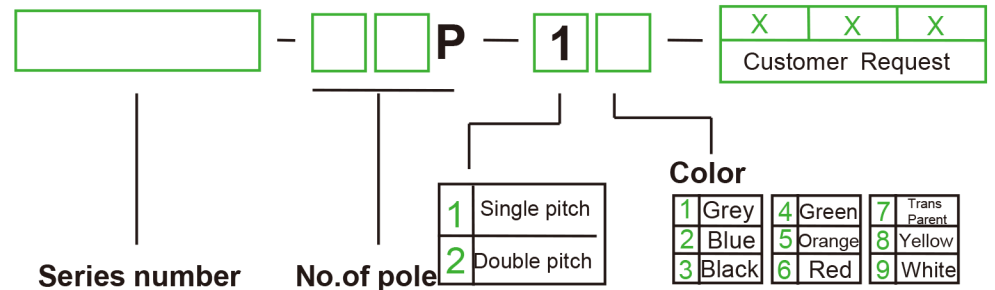

|                          |   |
|--------------------------|---|
| <br>mm<br>(INCH)         | <br>China · Kang Wei electronics co., LTD |
| <br>THROANGLE PROJECTION | <b>NAME</b><br><b>KV305-7.5</b>           |