

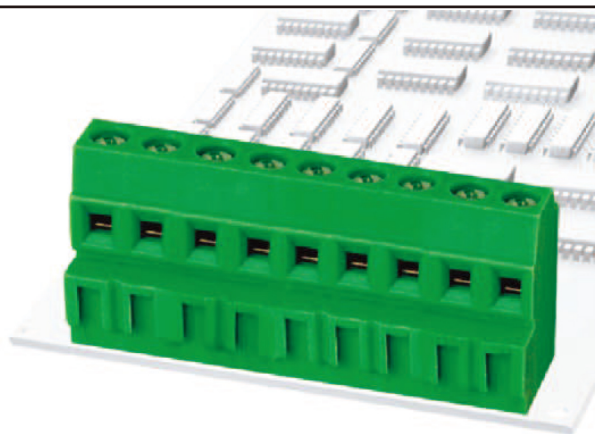






KV 381H-3.5
381H-3.81



APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

150V

10A

26-16AWG

IEC

130V

10A

1.0mm²

AC2000V/1Min

Menchanical

Torque

Ambient temperature

Strip length

Dimensions

pitch

Poles

0.2Nm(1.7Lb-In)

-40℃~+105℃

5mm

3.5mm(.138") 3.81mm(.150")

2-16P

Material

Housing

Screws

Pin header

Cage

PA66,UL94V-0

M2,Steel, Cr³⁺Znplated

Phosphor bronze,Tin-plated

Brass,Ni-plated

HOW TO ORDER :

- **P** - -

X	X	X
Customer Request		



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME **KV381H-3.5** **KV381H-3.81**