

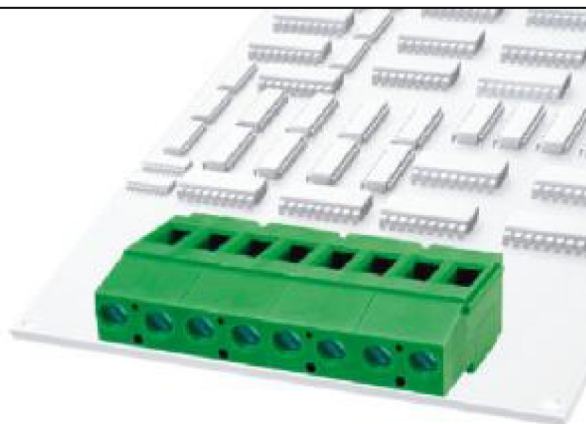






KV129R-5.0
KV129R-5.08

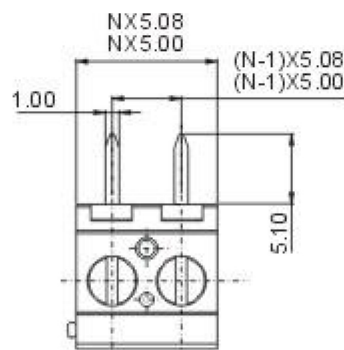

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

250V

20A

20A

26-12AWG

0.5-2.5mm²

AC2000V/1Min

Mechanical

Torque

Ambient temperature

Strip length

Dimensions

pitch

Poles

0.5Nm(4.4Lb-In)

-40℃~+105℃

7mm

5.0mm(.197") 5.08mm(.200")

2P,3P-24P

Material

Housing

Screws

Pin header

Cage

PA66,UL94V-0

M3,Steel, Cr³⁺ Znplated

Brass,Tin-plated

Brass,Ni-plated

HOW TO ORDER :

- P - 1 -

X	X	X
Customer	Request	



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME **KV129R-5.0 KV129R-5.08**