



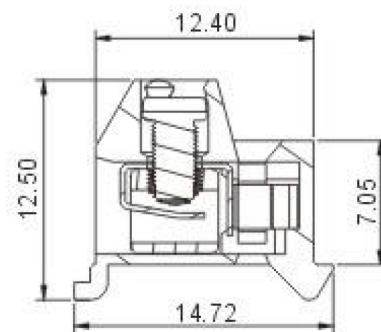

KV331-5.0

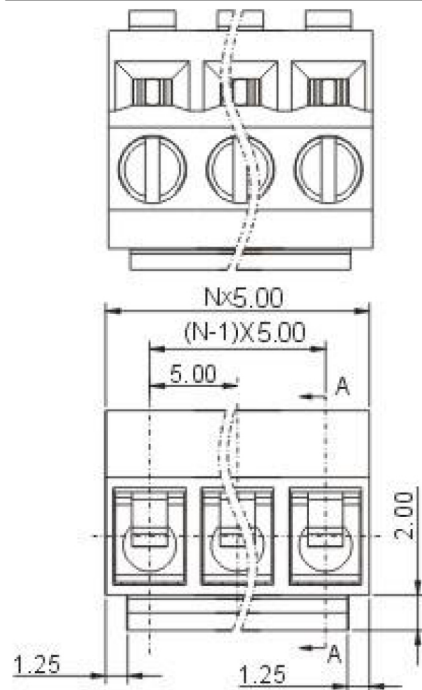

SECTION A-A

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

10A

28-14AWG

AC2000V/1Min

IEC

250V

24A

2.5mm²

Mechanical

Torque

Ambient temperature

Strip length

Dimensions

Pitch

Poles

0.5Nm(4.4Lb-In)

-40℃~+105℃

5-6mm

5.0mm(.197")

2P-20P

Material

Housing

Screws

Contact

Cage

PA66,UL94V-0

M3.0,steel, Cr³⁺ Zn-plated

Phosphor bronze

Brass,Ni plated

HOW TO ORDER :

- P - -

X	X	X
Customer Request		


Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



THIRD ANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

KV331-5.0