



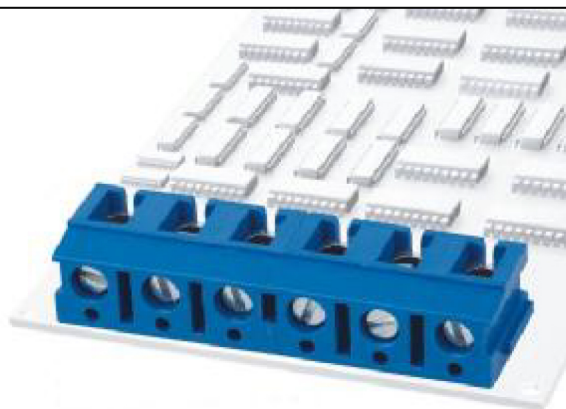

K V 300R-7.5

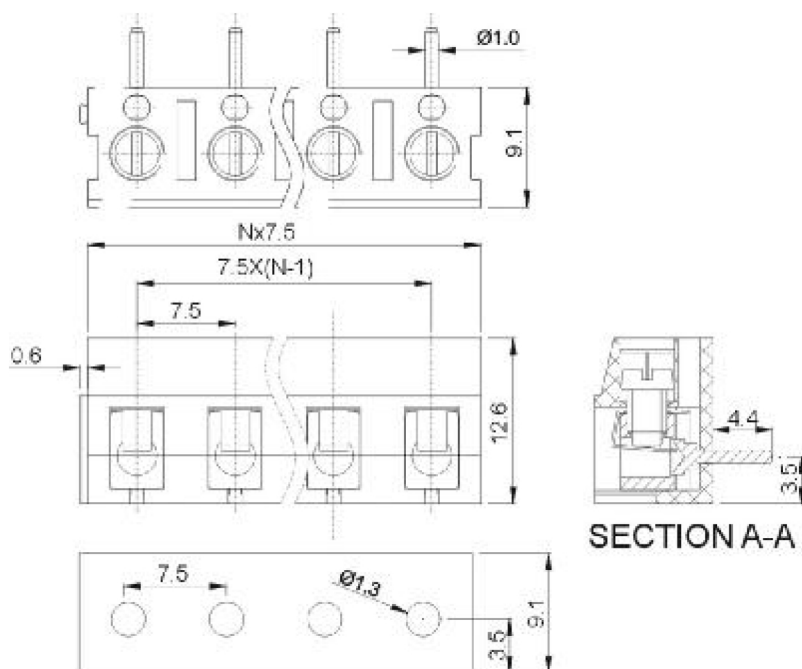

APPROVAL

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	24A
Wire range	22-14AWG	2.5mm ²
Withstanding voltage	AC2500V/1Min	

Mechanical

Torque	0.5Nm(4.4Lb-In)	
Ambient temperature	-30℃~+120℃	
Strip length	5-6mm	

Dimensions

Pitch	7.5mm(.295")	
Poles	2P,3P-24P	

Material

Housing	PBT,UL94V-0
Screws	M3,steel, Cr ³⁺ Zn-plated
Pin header	Brass,Tin plated
Wire guard	Stainless steel

HOW TO ORDER :

	-		P	-		-	
Series number		No. of pole			Color		Customer Request
		1 Single pitch			1 Grey	4 Green	7 Trans Parent
		2 Double pitch			2 Blue	5 Orange	8 Yellow
					3 Black	6 Red	9 White

mm (INCH)	 China · Kang Wei electronics co., LTD
THIROANGLE PROJECTION	NAME K V 300R-7.5