







| | | |
|----------------------|---|---|
| APPROVAL |  |  |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 10A | 15A |
| Wire range | 22-14AWG | 1.5mm ² |
| Withstanding voltage | AC2000V/1Min | |
| Mechanical | | |
| Torque | 0.4Nm(3.5Lb-In) | |
| Ambient temperature | -30℃~+120℃ | |
| Strip length | 5-6mm | |
| Dimensions | | |
| Pitch | 5.0mm(.197") | |
| Poles | 2P,3P-24P | |
| Material | | |
| Housing | PBT,UL94V-0 | |
| Screws | M2.5,steel, Cr ³⁺ Zn-plated | |
| Pin header | Brass,Tin plated | |
| Wire guard | Stainless steel | |

HOW TO ORDER :

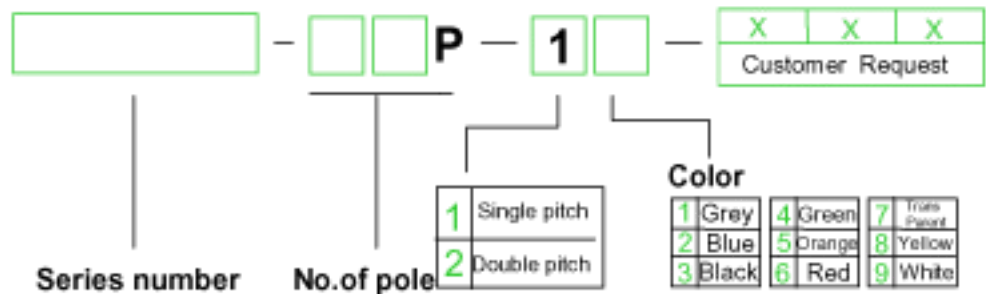

| | |
|--|---|
|  mm (INCH) |  China · Kang Wei electronics co., LTD |
|  TOLERANCE DIRECTION | NAME KV 306-5.0 |