




KV332K-5.0



APPROVAL

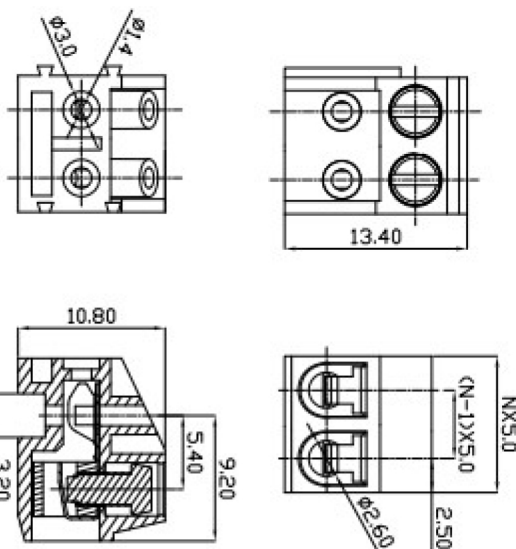

Electrical

Standard

UL

IEC

Rated voltage

300V

250V

Rated current

10A

12A

Wire range

28-16AWG

1.5mm²

Withstanding voltage

AC2000V/1Min

Mechanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-30℃~+120℃

Strip length

5-6mm

Dimensions

Pitch

5.0mm(.197")

Poles

2P,3P-24P

Material

Housing

PBT,UL94V-0

Screws

M2.5,steel, Cr³⁺ Zn;planted

Contact

Phosphor bronze

Cage:

Brass Ni plated

HOW TO ORDER :

DG332k-5.0

P

1

X

X

X

Customer Request


Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



China · Kang Wei electronics co., LTD

NAME

KV 332K-5.0