

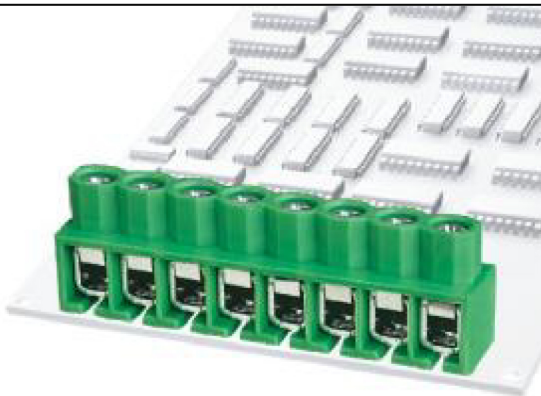


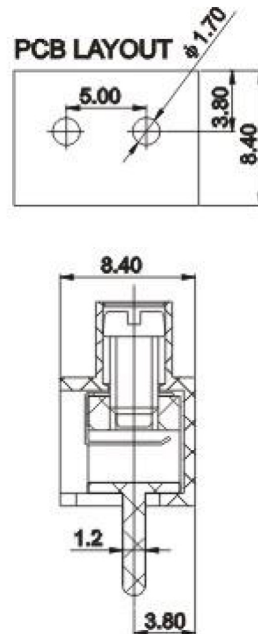

KV 166-5.0

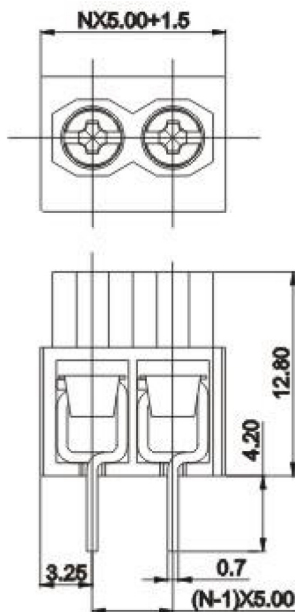

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

250V

15A

22A

22-12AWG

2.5mm²

AC2000V/1Min

Menchanical

torque

Ambient temperature

Strip length

Dimensions

pitch

Poles

0.5Nm(4.4Lb-In)

-40℃~+105℃

6-7mm

5.0mm(.197")

2P,3P-24P

Material

Housing

Screws

Pin header

Wire guard

PA66,UL94V-0

M2.5,steel, Cr³⁺Znplated

Brass,Tin plated

Stainless steel

HOW TO ORDER :

	-		P	-	1	-	X	X	X
							Customer Request		
Series number		No.of pole					Color		
							1 Grey	4 Green	7 Trans Parent
							2 Blue	5 Orange	8 Yellow
							3 Black	6 Red	9 White

mm (INCH) THIRDOANGLE PROJECTION	China · Kang Wei electronics co., LTD NAME
	KV 166-5.0